

11/08/99



jc520 U.S. PTO

PATENT

Attorney Docket No. MVMDINC.001CP1

Date: November 8, 1999

Page 1

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Erik J. van der Burg, Dino De Cicco, Andrew G.C. Frazier, Alex K. Khairkahan,

Marc S. Kriedler, Michael D. Lesh, Chad C. Roue

For: METHOD AND DEVICE FOR LEFT ATRIAL APPENDAGE OCCLUSION

Enclosed are:

(X) Twenty (20) sheets of drawing.

(X) Return prepaid postcard.



jc625 U.S. PTO

09/435562

11/08/99

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$380	\$380
Total Claims	60 - 20 =	40 ×	\$9	\$360
Independent Claims	10 - 3 =	7 ×	\$39	\$273
If application contains any multiple dependent claims(s), then add			\$130	\$0

FILING FEE TO BE PAID
AT A LATER DATE

\$1013

(X) Please use Customer No. 20,995 for the correspondence address.

Gerard von Hoffmann
 Gerard von Hoffmann
 Registration No. 33,043
 Attorney of Record

H:\DOCS\GVH\GVH-1684.DOC
110899

INTELLECTUAL PROPERTY LAW
KNOBBE, MARTENS, OLSON & BEAR

A LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS

PATENT, TRADEMARK AND COPYRIGHT CAUSES

620 NEWPORT CENTER DRIVE

SIXTEENTH FLOOR

NEWPORT BEACH, CALIFORNIA 92660-8016

(949) 760-0404

FAX (949) 760-9502

INTERNET: WWW.KNOB.COM

LOUIS J. KNOBBE*
DON W. MARTENS*
GORDON H. OLSON*
JAMES B. BEAR
DARRELL L. OLSON*
WILLIAM B. BUNKER
WILLIAM H. NIEMAN
LOWELL ANDERSON
ARTHUR S. ROSE
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR.
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL
ANDREW H. SIMPSON
JEFFREY L. VAN HOOSEAR
DANIEL E. ALTMAN
ERNEST A. BEUTLER
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMES*
STEVEN J. NATAUPSKY

PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER
BRENTON R. BABCOCK
THOMAS F. SNEGAL, JR.
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
RONALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKO
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
GINGER R. DREGER
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART, PH.D.
JAMES T. HAGLER
DOUGLAS G. MUEHLHAUSER
LORI LEE YAMATO
STEPHEN M. LOBBIN
ROBERT F. GAZDZINSKI
STACEY R. HALPERN
MICHAEL K. FRIEDLAND
DALE C. HUNT, PH.D.
LEE W. HENDERSON, PH.D.
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL

MARK M. ABUMERI
JON W. GURKA
KATHERINE W. WHITE
ERIC M. NELSON
ALEXANDER C. CHEN
MARK R. BENEDICT, PH.D.
PAUL N. CONOVER
ROBERT J. ROBY
SABING H. LEE
KAROLINE A. DELANEY
JOHN W. HOLCOMB
JAMES J. MULLEN, III, PH.D.
JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH.D.
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH.D.
DO TE KIM
TIRZAH ABE LOWE
GEOFFREY Y. IIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
GUY PERRY
JAMES W. HILL, M.D.
ROSE M. THIessen, PH.D.
MICHAEL L. FULLER
MICHAEL A. GUILIANA

OF COUNSEL
JERRY R. SEILER
JAPANESE PATENT ATTY
KATSUHIRO ARAI**
EUROPEAN PATENT ATTY
MARTIN HELLEBRANDT
KOREAN PATENT ATTY
MINCHEOL KIM
SCIENTISTS & ENGINEERS
(NON-LAWYERS)
RAIMOND J. SALENIEKS**
NEIL S. BARTFELD, PH.D.**
DANIEL E. JOHNSON, PH.D.**
JEFFERY KOEPKE, PH.D.
KHURRAM RAHMAN, PH.D.
JENNIFER A. HAYNES, PH.D.
BRENDAN P. O'NEILL, PH.D.
THOMAS Y. NAGATA
ALAN C. GORDON
PABLO S. HUERTA
LINDA H. LIU
MICHAEL J. HOLIHAN
YASHWANT VAISHNAV, PH.D.

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : MVMDINC.001CP1
Applicant(s) : Erik J. van der Burg et al.
For : METHOD AND DEVICE FOR LEFT ATRIAL
APPENDAGE OCCLUSION
Attorney : Gerard von Hoffmann
"Express Mail"
Mailing Label No. : EL193421045US
Date of Deposit : November 8, 1999

I hereby certify that the accompanying

Transmittal; Specification in 34 pages; 20 sheets of drawings; Return Prepaid
Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.

DON KING

H:\DOCS\GVH\GVH-1685.DOC
110899

METHOD AND DEVICE FOR LEFT ATRIAL APPENDAGE OCCLUSION

This is a continuation-in-part of U.S. Patent Application No. 09/187,200, filed November 6, 1998, the disclosure of which is incorporated in its entirety herein by reference.

Background of the Invention

Embolic stroke is the nation's third leading killer for adults, and is a major cause of disability. There are over 700,000 strokes per year in the United States alone. Of these, roughly 100,000 are hemorrhagic, and 600,000 are ischemic (either due to vessel narrowing or to embolism). The most common cause of embolic stroke emanating from the heart is thrombus formation due to atrial fibrillation. Approximately 80,000 strokes per year are attributable to atrial fibrillation. Atrial fibrillation is an arrhythmia of the heart that results in a rapid and chaotic heartbeat that produces lower cardiac output and irregular and turbulent blood flow in the vascular system. There are over five million people worldwide with atrial fibrillation, with about four hundred thousand new cases reported each year. Atrial fibrillation is associated with a 500 percent greater risk of stroke due to the condition. A patient with atrial fibrillation typically has a significantly decreased quality of life due, in part, to the fear of a stroke, and the pharmaceutical regimen necessary to reduce that risk.

For patients who develop atrial thrombus from atrial fibrillation, the clot normally occurs in the left atrial appendage (LAA) of the heart. The LAA is a cavity which looks like a small finger or windsock and which is connected to the lateral wall of the left atrium between the mitral valve and the root of the left pulmonary vein. The LAA normally contracts with the rest of the left atrium during a normal heart cycle, thus keeping blood from becoming stagnant therein, but often fails to contract with any vigor in patients experiencing atrial fibrillation due to the discoordinate electrical signals associated with AF. As a result, thrombus formation is predisposed to form in the stagnant blood within the LAA.

Blackshear and Odell have reported that of the 1288 patients with non-rheumatic atrial fibrillation involved in their study, 221 (17%) had thrombus detected in the left atrium of the heart. Blackshear JL, Odell JA., Appendage Obliteration to Reduce

Stroke in Cardiac Surgical Patients With Atrial Fibrillation. Ann Thorac. Surg., 1996.61(2):755-9. Of the patients with atrial thrombus, 201 (91%) had the atrial thrombus located within the left atrial appendage. The foregoing suggests that the elimination or containment of thrombus formed within the LAA of patients with atrial fibrillation would significantly reduce the incidence of stroke in those patients.

Pharmacological therapies for stroke prevention such as oral or systemic administration of warfarin or the like have been inadequate due to serious side effects of the medications and lack of patient compliance in taking the medication. Invasive surgical or thorascopic techniques have been used to obliterate the LAA, however, many patients are not suitable candidates for such surgical procedures due to a compromised condition or having previously undergone cardiac surgery. In addition, the perceived risks of even a thorascopic surgical procedure often outweigh the potential benefits. See Blackshear and Odell, above. See also Lindsay BD., Obliteration of the Left Atrial Appendage: A Concept Worth Testing, Ann Thorac. Surg., 1996.61(2):515.

Despite the various efforts in the prior art, there remains a need for a minimally invasive method and associated devices for reducing the risk of thrombus formation in the left atrial appendage.

Summary of the Invention

There is provided in accordance with one aspect of the present invention, a method of occluding an atrial appendage. The method comprises the steps of inhibiting changes in the volume of the appendage, and occluding the opening to the appendage. The inhibiting changes in the volume step preferably comprises introducing a bulking element into the appendage to resist compression of the appendage wall. Preferably, the bulking element is an expandable element. In one embodiment, the introducing an expandable bulking element step comprises deploying a self-expandable bulking element from a deployment catheter. The occluding step comprises positioning an occlusion element to enclose the bulking element within the appendage.

In accordance with another aspect of the present invention, there is provided a method of facilitating cell growth onto an atrial appendage occlusion device. The method comprises the steps of positioning an occlusion device across the opening of the appendage, the occlusion device having a tissue attachment surface thereon. The

method additionally comprises the step of resisting compression of the appendage at least during a tissue attachment period of time. The resisting step preferably comprises positioning a bulking structure within the appendage.

5 In accordance with a further aspect of the present invention, there is provided an occlusion device for implantation within the left atrial appendage. The occlusion device comprises an occluding member, enlargeable from a reduced cross section to an enlarged cross section. The occlusion device may further comprise a stabilizing member, enlargeable from a reduced cross section to an enlarged cross section. The enlarged cross section of the stabilizing member may be less than the enlarged cross section of the occlusion member. Any of the occluding member and stabilizing member structures disclosed herein can be provided as an occluding member alone, without the
10 corresponding stabilizing member.

The occlusion device preferably further comprises a hub between the occlusion member and the stabilizing member. The occlusion member comprises an expandable
15 frame, which may be made from at least two spokes. Each spoke has a first end and a second end, and the first end is attached to the hub. The spokes are movable between an axial orientation to provide a low profile such as for transluminal implantation, and a radially enlarged orientation such as during implantation within the appendage to occlude the appendage.

20 The stabilizing member comprises at least two elements which are movable from an axial orientation when the stabilizing member is in the reduced cross section to an inclined orientation when the stabilizing member is in the enlarged cross section. In one embodiment, each element comprises a proximal section, a distal section, and a bend in-between the proximal and distal sections when the stabilizing member is in the
25 enlarged cross section. Preferably, the occlusion device further comprises at least one tissue attachment element such as a hook, spike or barb.

In accordance with a further aspect of the present invention, there is provided an occlusion device for occluding a tubular body structure. The occlusion device comprises a body, having a longitudinal axis. An expandable occlusion member is
30 provided at a first position on the axis, and a stabilizing member is provided at a second position on the axis. The occlusion member comprises a plurality of spokes which are

hingeably attached to the body and movable between an axial orientation and an inclined orientation.

Preferably, the occlusion member further comprises a polymeric membrane carried by the spokes. The stabilizing member comprises at least three radially outwardly movable elements. In one embodiment, a hinge is provided on the body between the occlusion member and the stabilizing member. One hinge construction comprises a helical coil.

In accordance with a further aspect of the present invention, there is provided a method of making an occlusion device. The method comprises the steps of providing a tube, having a first end, a second end, and a longitudinal axis. A plurality of axially extending slots are cut at a first position on the tube, to create a first plurality of longitudinal elements. A second plurality of axially extending slots are cut at a second position on the tube, to create a second plurality of longitudinal elements.

The method further comprises the steps of providing a radially outwardly directed bias on at least one of the first and second plurality of elements. A polymeric membrane may be attached to at least one of the first and second plurality of elements. In one embodiment, a hinge is provided on the tube in-between the first and second plurality of elements.

In accordance with a further aspect of the present invention, there is provided a method of occluding an atrial appendage. The method comprises the steps of introducing a stabilizing member into the appendage, for resisting compression of the appendage wall, and preventing rotation and axial migration of the implant, and positioning an occlusion member across the appendage. The introducing step preferably comprises introducing a radially expandable stabilizing member, and radially expanding the member within the appendage. The positioning step may comprise either positioning the occlusion member within the appendage, or positioning the occlusion member across an opening of the appendage. In one embodiment, the introducing and positioning steps are accomplished by introducing a deployment catheter within the appendage and deploying the stabilizing member and occluding member from the catheter. Preferably, the method further comprises the step of facilitating cell growth onto the occlusion member.

Further features and advantages of the present invention will become apparent to those of ordinary skill in the art in view of the detailed description of preferred embodiments which follows, when considered together with the attached drawings and claims.

5

Brief Description of the Drawings

FIG. 1 shows a perspective view of an embodiment having features of the invention with an occluding member and a retention member.

FIG. 2 shows an end view of the apparatus of FIG. 1 in partial section.

FIG. 3 shows a longitudinal cross-sectional view of the apparatus of FIGS. 1 and 2.

FIG. 3A shows a perspective view of an apparatus having features of the invention.

FIG. 3B shows an elevational view in partial section of the apparatus of FIG. 3A.

FIG. 4 shows an elevational view of an apparatus having features of the invention in a deployed state within a body cavity.

FIG. 5 shows an elevational view of an apparatus having features of the invention in a deployed state within a body cavity.

FIG. 6 shows a perspective view of an apparatus for sealing off a body cavity having features of the invention.

FIG. 7 shows an elevational view in partial section of an apparatus for sealing off a body cavity having features of the invention.

FIG. 8 shows a transverse cross-sectional view of the apparatus of FIG. 7 taken along lines 8-8.

FIG. 9 shows a schematic view of a patient's heart with a transeptal catheter deployed through the septum and a delivery catheter and apparatus for sealing off a body cavity disposed therein.

FIG. 10 shows a schematic view of a patient's heart in partial section with a delivery catheter disposed within the opening of the LAA.

FIG. 11 shows a magnified view of the delivery catheter distal end and the LAA of a patient of FIG. 10 with an apparatus for sealing off a body cavity partially deployed within the LAA.

5 FIG. 12 shows the apparatus for sealing off a body cavity of FIG. 11 fully deployed within a LAA.

FIG. 13 shows an elevational view of a device for occluding a body cavity having features of the invention.

FIG. 14 shows a transverse cross sectional view of the device for occluding a body cavity of FIG. 13 taken along lines 14-14.

10 FIG. 15 shows a device for occluding a body cavity having features of the invention deployed within a LAA.

FIG. 16 shows a device for occluding a body cavity having features of the invention deployed within a LAA.

15 FIG. 17 shows a LAA being occluded by a method having features of the invention.

FIG. 18 shows a LAA occluded by method having features of the invention.

FIG. 19 shows a LAA occluded by method having features of the invention.

FIG. 20 is an elevational view of an apparatus for closing an interior body cavity of a patient in partial section having features of the invention.

20 FIG. 21 is a schematic view of an apparatus for closing an interior body cavity of a patient in contact with tissue of a LAA.

FIG. 22 is a schematic view of an apparatus for closing an interior body cavity of a patient in contact with tissue of a LAA.

25 FIG. 23 shows a LAA which has been closed by a method having features of the invention.

FIG. 24 is a perspective view of an occlusion device in accordance with the present invention.

FIG. 25 is a side elevational view of the occlusion device shown in FIG. 24.

30 FIG. 26 is a perspective view of an alternate embodiment of the present invention.

FIG. 27 is a side elevational view of the embodiment shown in FIG. 26.

FIG. 28 is a perspective view of a further embodiment of the present invention.

FIG. 29 is a side elevational view of the embodiment of FIG. 28.

FIG. 30 is a perspective view of a further occlusion device in accordance with the present invention.

5 FIG. 31 is an end view taken along the line 31-31 of FIG. 30.

FIG. 32 is a schematic illustration of an inflatable balloon positioned within the occlusion device of FIG. 30.

FIG. 33 is a schematic view of a pull string deployment embodiment of the occlusion device of FIG. 30.

10 FIGS. 34A and 34B are side elevational schematic representations of partial and complete barrier layers on the occlusion device of FIG. 30.

FIG. 35 is a side elevational schematic view of an alternate occlusion device in accordance with the present invention.

15 FIG. 36 is a schematic view of a bonding layer mesh for use in forming a composite barrier membrane in accordance with the present invention.

FIG. 37 is an exploded cross sectional view of the components of a composite barrier member in accordance with the present invention.

FIG. 38 is a cross sectional view through a composite barrier formed from the components illustrated in FIG. 37.

20 FIG. 39 is a top plan view of the composite barrier illustrated in FIG. 38.

Detailed Description of the Preferred Embodiment

25 FIGS. 1-3 show an embodiment of an occluding device 10 having features of the invention where an occluding member 11 is secured to a retention member 12 that is arranged to fix the occluding member in a desired position within a body passageway or cavity. The occluding member 11 generally has disc shape with an outer rim 13 around the perimeter of a frame structure 14 which supports a barrier 15. The outer rim 13 can be circular or polygonal, or any other shape that is suitable for conforming to the inside surface of a body cavity. A hub 16 can be located near the center of the occluding member 11 which serves to connect the retention member 12 to the occluding member, 30 in addition to other functions. The outer rim 13 is typically made from a soft polymer material 17 which permits flexibility of the outer rim and facilitates sealing of the outer

rim against the inside surface of a body cavity or passageway. The barrier 15 can be a thin mesh or film of material which serves to block the passage of material within an area surrounded by the outer rim 13. The barrier 15 can be secured to the outer rim 13 along its entire perimeter 18 in order to achieve a complete seal therebetween and can be molded into the outer rim 13 or bonded thereto by a suitable method such as gluing, welding, sewing or other suitable method.

The outer rim 13 is at least partially supported by the frame structure 14 which connects the outer rim and the hub. The frame structure 14 can be made from one or more elements of high strength material such as stainless steel or MP35N, or may preferably be made from shape memory or pseudoelastic alloys such as NiTi, or any of a variety of known structural biodegradable materials (e.g. polyglycolic acid, poly lactic acid, poly-L-lactic acid and derivatives or copolymers such as PLGA). Preferably, the frame structure 14 is made from a material which can be self-expanding from a constrained configuration so that the occluding device 10 can be delivered to the deployment site in a low profile an flexible configuration which facilitates percutaneous delivery.

Preferably a radial hoop 21 is contained within the soft polymer material 17 of the outer rim 13 and serves to maintain the annular shape of the outer rim and facilitate radial expansion of the outer rim from a constrained position or configuration. The radial hoop 21 may be isolated within the soft polymer material 17 of the outer rim 13, or may be connected to at least some of the elements 22 of the frame structure 14, in order to have stronger mechanical joint between the outer rim and the frame structure. The radial hoop 21 is shown in a substantially circular configuration, but may also be polygonal or otherwise suitably shared, and may have connections or joints spaced thereon to facilitate contraction or folding of the device for non-invasive delivery.

In addition to connecting the retention member 12 and the occluding member 11, the hub 16 may serve to house a rotational coupling 23 which is connected to the proximal end 24 of a tissue penetrating shaft 25 within the retention member. The rotational coupling 23 allows the transfer of torque to the tissue penetrating shaft 25 which preferably has a helically shaped extension or distal extremity 26 which is configured to screw into tissue and be mechanically fixed thereto. Longitudinal

movement of the tissue penetrating shaft 25 relative to the retention member 12 and hub 16 may be prevented by sizing a lumen 27 of the retention member which contains the tissue penetrating shaft such that the helically shaped extension 26 at the distal end is too large to pass through the lumen and the proximal end 24 of the tissue penetrating shaft is prevented from passing through the lumen by the rotational coupling attached thereto. The rotational coupling 23 may also be configured to be longitudinally captured by the hub 16 but still be rotatably disposed therein.

FIGS. 3A and 3B depict an alternative embodiment of an occluding device 10 having an occluding member 11 and a retention member 12. The retention member 12 has a shaft 28 and radially extending members 29 extending radially from a proximal end of the shaft. The radially extending members 29 serve to anchor the shaft 28 and the occluding member 11 by engaging the tissue surrounding the occluding device. Preferably, the radially extending members are self-expanding from a constricted state and are made of a pseudo elastic alloy such as NiTi, or a high strength material such as stainless steel. Although it is preferable for the radially extending members 29 to be self-expanding from a constricted state, they may also be expanded by use of shape memory properties or a radial outward force as would be provided by an inflatable balloon or the like. The shaft 28 can be a single element or made of multiple elements, and can be made from the same materials as the radially extending members or different materials such as polymers or polymer composites. The radially extending members 29 have a proximally directed bias at their radial extremities 29A so that the members readily fold down and move easily in a distal direction during insertion of the occluding device 10, but spring outward and aggressively engage surrounding tissue upon movement in a proximal direction. This configuration of the radially extending members 29 allows easy insertion into a body cavity, but prevents egress of the device 10 in and outward or proximal direction.

FIG. 4. depicts an occluding device 30 similar to that depicted in FIGS. 1-3 deployed within the left atrial appendage 31 of a patient. An outer rim or periphery 32 of the occluding device 30 is disposed adjacent the opening 33 of the left atrial appendage 31 in a position which allows for a substantial seal of the outer rim against the inside surface 34 of the LAA. A helically shaped distal extremity 35 of a tissue

penetrating shaft 36 has been screwed into the wall tissue of the LAA and is mechanically secured thereto. A retention member 38 maintains the position of an occluding member 41 in a substantially perpendicular orientation with respect to a longitudinal axis of the LAA 42.

5 FIG. 5 depicts an occluding device similar to that depicted in FIGS. 1-4 deployed within a LAA 51 of a patient similar to what is shown in FIG. 4. The structure of an occluding member 52 of the embodiment as shown in FIG. 5 differs from that shown in FIG. 4 in that a barrier 53 and frame structure 54 of the embodiment of FIG. 5 protrudes proximally from a plane defined by an outer rim 55. This
10 configuration may be useful for certain morphologies of patient's LAAs. One object of the invention is to create a smooth surface outside the body passageway or cavity in order to prevent turbulent flow or eddies of blood or other bodily fluid within the cavity or passageway. The alternative configuration of the occluding device 50 shown in FIG. 5 may be useful in this regard.

15 FIG. 6 shows an alternative embodiment of an occluding device 60 which has an occluding member 61, a frame structure 62, a barrier 63 and a retention member in the form of an expandable member 65 which has linked elements 66 that are preferably expandable from a constrained configuration. The expandable member 65 is generally cylindrical in shape and can have a series of circumferential linked elements 66
20 connected by links 68. Although FIG. 6 depicts the expandable member 65 as a series of linked elements 66, those skilled in the art will realize that a similar effect can be achieved with a single wire in a helical configuration or a plurality of wires in a mesh or braided configuration, or any other suitable configuration that can be self-expanding from a constrained configuration or expanding with the application of heat or other form
25 of energy or force. For example, the expandable member 65 may be configured to be deployed by an outward radial force delivered from within the expandable member. An inflatable balloon or the like could be used to exert such a force. The expandable member is preferably secured to an outer rim 71 of the occluding member 61 but may also be secured to the frame structure 62 directly or indirectly. The expandable member
30 65 can be self-expanding from a constrained configuration as can the occluding member 61 and the frame structure 62 and outer rim 71 thereof. The frame structure 62,

outer rim 71 and barrier 63 may have construction similar to that described above with regard to the similar elements of the embodiments depicted in FIGS. 1-5.

Referring to FIG. 7, the expandable member 65 as shown in FIG. 6 may also have a sheath 72 disposed around it so as to act as a shield between the expandable member and an inner surface of a patient's body cavity or passageway. The sheath 72 may facilitate the sealing function of the occluding member 61, but is primarily intended to prevent damage to either tissue on the inside surface of a body cavity or to the linked elements 66 of the expandable member. The sheath 72 may surround all or part of the expandable member 65 and may be made from a variety of suitable biocompatible materials such as Dacron®, Nylon, TFE, PTFE or ePTFE. The sheath 72 may be a weave, braid, film or have any other suitable configuration. Expandable member 65 may also be coated by dipping, spraying, or other suitable process with a friction reducing material such as Teflon®, or with an active compound such as heparin.

FIG. 8 shows a transverse cross-sectional view of the embodiment of FIG. 7 taken at lines 8-8. The frame structure 62 has an axis or hub 73 disposed at approximately the center of the frame structure which serves to connect the various radial elements 74 of the frame structure. The hub 73 can have an independent structure that links the several elements 74 of the frame structure 62 or it may be merely the terminus of the various frame structure elements and have a solid composition. In either structure, the hub 73 preferably allows a constrained configuration of the occluding member 61 to facilitate percutaneous delivery of the occluding device 60. The hub 73 may also have a lumen disposed therein to allow passage of a guidewire or other guiding member. Preferably, the lumen would have a self sealing valve or gasket which prevents the passage of fluid or embolic material once the guidewire or guiding member is removed from the lumen.

Referring to FIG. 9, a schematic view of a patient's heart 80 in partial section shows a trans-septal catheter 81 having a proximal end 82 and a distal end 83. The distal end 83 of the trans-septal catheter 81 is disposed within a patient's heart 80 with the distal end 84 of a delivery catheter 85 extending from the distal end 83 of the trans-septal catheter. The distal end 83 of the trans-septal catheter 81 has breached the septum 86 of the patient's heart 80 and is disposed adjacent the opening of the patient's

LAA 88. At the proximal end 82 of the trans-septal catheter 81 there is a Luer connector 91 coupled to a hemostasis valve 92 which prevents the egress of blood from a lumen 93 of the trans-septal catheter 81. The proximal end 94 of the delivery catheter 85 extends proximally from the hemostasis valve 92 and has a Luer connector 95 attached to the proximal extremity thereof. The proximal end 96 of a plunger 97 extends from the Luer connector 95 of the delivery catheter. The proximal end 94 of the delivery catheter is arranged to allow rotational and axial movement of the plunger 97 while preventing blood or other bodily fluids from leaking between the delivery catheter 85 and the plunger 97.

Referring to FIG. 10, a patient's heart 80 is shown in partial section with the distal end 84 of a delivery catheter 85 disposed within the LAA opening 87. FIG. 11 is a magnified view of the LAA 88 shown in FIG. 10 and the distal end of the delivery catheter 84, which is shown in partial section, contains a plunger 97 which is slideably disposed within an inner lumen 98 of the delivery catheter 85 and serves to apply axial force in a distal direction on the collapsed occluding member 101 disposed within the delivery catheter so as to force the occluding device 102 from the delivery catheter and deploy it. An occluding device 102 having an expandable member 103 and an occluding member 101 secured thereto is partially deployed and extending from the distal end of the delivery catheter 84 into the patient's LAA 88. The occluding device 102 can also be guided into the patient's LAA 88 by use of an appropriate guidewire or guiding member.

FIG. 12 shows the occluding device 102 of FIG. 11 in a deployed state within the patient's LAA 88. An outer rim 104 of the occluding member 101 is in substantial sealing contact with the inside surface 105 of the LAA 88. The expandable member 103 has expanded so as to contact the inside surface 105 of the LAA and secure the occluding device 102 thereto and maintain the occluding member 101 in a substantially perpendicular orientation relative to a longitudinal axis 106 of the LAA 88. A barrier 107 is disposed within an area bounded by the outer rim 104 and is positioned to prevent the passage or embolic or other material to or from the LAA 88. The distal end 108 of the plunger 97 is extending from the distal end of the delivery catheter 84 after having pushed the occluding device 102 from the delivery catheter.

Referring to FIG. 13, an occluding device 110 having features of the invention is shown. The occluding device 110 has a delivery catheter 111 with a distal end 112, a detachment mechanism 113 disposed on the distal end of the delivery catheter and an occlusive body or inflatable member 114 detachably secured to the detachment mechanism. The inflatable member 114 has a proximal end 115 and a distal end 116 with the proximal end being attached to the detachment mechanism 113 and the distal end terminating at an end cap 117. The inflatable member 114 has an outside surface 118 that may contain a fibrosis inducing material such as Dacron® or other similar materials. The inflatable member 114 may be made from a fluid tight film of polymer material which can be either compliant or non-compliant. Preferably the inflatable member 114 is made from silicone, however, any suitable material such as polyethylene, polyurethane or PET can be used.

The detachment mechanism 113 can be activated by mechanical force or by delivery of thermal or optical energy by a suitable conduit. Alternatively, the inflatable member can be pushed into the LAA from the delivery catheter 111 by an elongate push member without the use of a detachment mechanism. The inflatable member 114 can be filled with a gas, fluid or gel which is injected under pressure through the delivery catheter 114 and into the inflatable member. Suitable fluids to inject would include saline and silicone. The inflatable member 114 may also be filled with a polymer material that can be hardened. Autologous fluid such as blood, or collagen may also be used. A fluid, gel or polymer used to fill the inflatable member may contain contrast agents such as gold, tantalum, bismuth, barium sulfate or the like in order to improve visualization under fluoroscopy or x-ray imaging.

FIG. 14 is a transverse cross-sectional view of the occluding device 110 of FIG. 13 taken along lines 14-14. An optional inner shaft 121 is shown disposed within the inflatable member 114, preferably in a concentric arrangement. The inner shaft 121 provides longitudinal axial support to the inflatable member 114 so as to maintain a longitudinal dimension of the inflatable member 114 when it is being inflated and deployed. The inner shaft 121 may be solid or contain one or more lumens that may or may not be in fluid communication with an inner lumen 122 of the inflatable member 114, and can be used for the passage of a guidewire or guiding member.

FIG. 15 depicts an alternative embodiment of an occluding device 110 which consists of an inflatable member 114 similar to the inflatable member of FIG. 13, shown substantially deployed, within a patient's LAA 123. The inflatable member 114 has been at least partially filled with a fluid, gas or gel within the patient's LAA 123 such that the outside surface of the inflatable member 118 is in contact with at least part of the inside surface 124 of the LAA. The inflatable member 114 can have rib members 125 which can mechanically interlock with the trabeculae 126 of the inside surface of the LAA 124 or other surface irregularities of the inside surface of a patient's body cavity or passageway. The rib members 125 form a complete circumference of the inflatable member 114, but could also form a partial circumference, spiral configuration, or consist of random projections on the surface of the inflatable member 118. The rib members 125 should extend radially about 1 to about 4 mm from the nominal surface of the inflatable member 114, and are preferably spaced about 3 to about 8 mm from each other. The rib members 125 may be made from any suitable polymer material, but are preferably made from the same material as the inflatable member, and are integrally molded thereon, or bonded thereto with a heat weld or adhesive bond suitable for bonding flexibly medical polymers. The inflatable member 114 is depicted with the distal end of the delivery catheter 112 and detachment mechanism 113 attached. As an alternative, or in addition to the polymer rib members 125 shown in FIG. 15, barbs or hooks could be secured to the outside surface of the inflatable member 114 which are configured to engage the inside surface of a patient's LAA 124. Preferably, barbs or hooks disposed on the outside surface of the inflatable member and configured to engage the tissue of the inside surface of a patient's LAA 124 would have a proximally directed bias at their radial extremity so that the barbs would fold down and move easily in a distal direction during insertion of the inflatable member 114, but would spring outward and aggressively engage the tissue of the body cavity upon movement in a proximal direction of the inflatable member.

FIG. 16 depicts an occluding device 110 consisting of an inflatable member 114 which is shown deployed within a patient's LAA 123. The embodiment of the inflatable member 114 shown in FIG. 16 has an optional retention member 127 with a tissue penetrating shaft 128 which has a proximal 131 end and a distal end 132. A

rotational coupling 133 is disposed at the proximal end 131 of the tissue penetrating shaft 128 and a helically shaped extremity 134 is disposed at the distal end of the shaft 132. The helically shaped distal extremity 134 is shown deployed within and mechanically engaging wall tissue 135 of the LAA so as to secure the inflatable member 114 and maintain its position within the LAA 123 of the patient.

FIG. 17 shows an alternative embodiment of an occlusive member 140 consisting of a polymer mass 141 which has been injected or delivered into a patient's LAA 142. The distal end 143 of a delivery catheter 144 has a lumen 145 therein which extends to a proximal end of the delivery catheter which is in fluid communication with a source of pressurized polymer material. A source of pressurized polymer material 146 can be any type of pump or device capable of forcing a polymer fluid or gel into the proximal end of the delivery catheter with sufficient pressure to force the polymer fluid or gel out the distal end 143 of the delivery catheter 144 and into a patient's body cavity or passageway. The delivery catheter 144 may be positioned by the techniques discussed above, e.g., the Mullins trans-septal approach or any other suitable method. Once the distal end of the delivery catheter 143 is disposed within a desired portion of the patient's LAA 142, the polymer mass 141 may be injected to fill the cavity to the desired level. The LAA 142 can be completely or partially filled with the polymer mass 141 which can be formulated to harden over time, with heat or remain in a fluid or gel state. The distal end of the delivery catheter can optionally include an expandable member which is used to substantially seal the delivery catheter against the inside surface of the opening of the patient's body cavity during the delivery of polymer material. The expandable member can be an inflatable balloon or the like which are well known in the art.

Optionally, a retention member 127 having a tissue penetrating shaft 128 or the like, such as shown in FIG. 16 with regard to the inflatable member 114, may be deployed within the LAA 142 prior to injection of the polymer mass 141 and captured thereby so as to secure the polymer mass within the LAA. Alternatively, the polymer mass can be used to fill the patient's LAA and surround and secure a deployed device as shown in FIGS. 4 or 5 in the patient's LAA 142.

Once a desired amount of polymer mass 141 has been injected into the LAA 142, as assessed for example by TE Echo imaging, the delivery catheter 144 may be withdrawn and the procedure terminated. Preferably, the entire LAA 142 of a patient is filled with the polymer mass 141 as shown in FIG. 18 and hardens or gels to maintain its shape. It may be desirable to have the polymer mass 141 retain a soft compressible form after setting or hardening so that it is at least partially compliant with the constrictive pumping action of a heart and resistant to fatigue as a result thereof. A material used to form the polymer mass 141 may contain contrast agents such as gold, platinum, tantalum, bismuth or the like in order to better visualize the deployment of the polymer mass under fluoroscopic or x-ray imaging.

Another alternative embodiment of an occlusive member 140 can be found in FIG. 19 which shows an occlusive coil 147 which has been deployed within an LAA 142. The occlusive coil 147 as shown has assumed a random configuration that is mechanically occluding the LAA 142 and which has induced clot and/or fibrosis formation 148 which further facilitates occlusion of the LAA 142.

An apparatus for closing off a body cavity or passageway 150 is shown in FIG. 20 which has features of the present invention. The apparatus 150 has an elongate shaft 151 with an inner lumen 152 and a proximal end 153 and a distal end 154. Slideably disposed within the inner lumen 152 of the elongate shaft 151 are at least two elongate members 155 which have proximal ends 156 and distal ends 157 and have tissue attachment members 158 disposed on the distal ends. An optional distal anchor member 161 is also slideably disposed within the inner lumen 152 of the elongate shaft 151 and preferably has a distal end 162 terminating with a helical member 163. The proximal end 153 of the elongate shaft 151 has a proximal control module 164 which seals the inner lumen 152 of the elongate shaft 151 and allows rotation and translation of the proximal ends 156 of the elongate members 155 and the distal anchor member 161 while maintaining a seal between said members to prevent leakage of bodily fluids therefrom. The proximal control module 164 can optionally be configured to control advancement and retraction of the elongate members 155 and control activation of the tissue attachment members 158.

FIG. 21 shows the apparatus for closing off a body cavity 150 of FIG. 20 with the distal ends of the elongate members 157 and the tissue attachment members 158 extending distally from the distal end of the elongate shaft 154. The distal ends of the elongate members 157 are angled or deflected from a longitudinal axis 165 of the elongate shaft 151 so as to engage tissue 166 of the opening 167 of the LAA 168 as shown. The elongate members 155 may be deflected by an abutment or angulation contained in the distal end of the elongate shaft 154, but are preferably preshaped in an angled configuration which manifests when the distal ends are freed of the constraint of the inner lumen 152 of the elongate shaft and allowed to assume their relaxed preshaped condition. The helical member 163 at the distal end 162 of the distal anchor member 161 is engaged with the wall tissue 171 of the LAA 168 so as to provide an optional anchor that can be used to move the elongate shaft 151 relative to the distal anchor member 161 and give greater control of the longitudinal axial movement of the elongate shaft relative to the LAA opening 167. The tissue attachment members 158 are shown attached to the annular edge 172 of the LAA opening 167. Once the tissue attachment members 158 are attached, a closure member or retaining ring 173 may be advanced distally by applying axial force on an elongate push shaft 174 which draws the tissue attachment members 158 and the tissue attached thereto closer together as shown in FIG. 22. As the closure member 173 is further advanced distally, the annular edge of the LAA 172 is drawn closed, and eventually, the annular edge of the LAA will be completely closed into a closed state with the closure member 173 surrounding and compressing the tissue of the annular edge as shown in FIG. 23. Once a closed state of the LAA is achieved, the tissue attachment members 158 may be detached, and the apparatus for closing off a body cavity 150 withdrawn. One alternative method can have the tissue attachment members 158 drawn together by retracting them proximally into the distal end 154 of the elongate shaft 151 as opposed to distally advancing the closure member 173 with the elongate push shaft 174. In this way, the annular edge of the LAA 172 can be drawn into a closed state within the distal end 154 of the elongate shaft 151 at which point the annular edge may be fixed in the closed state by a variety of methods including suturing, tissue welding, the application of a suitable biocompatible adhesive, surgical staples or the like.

Referring to FIGS. 24 and 25, there is illustrated an alternate embodiment of the occlusion device 10 in accordance with the present invention. The occlusion device 10 comprises an occluding member 11 comprising a frame 14 and a barrier 15. In the illustrated embodiment, the frame 14 comprises a plurality of radially outwardly extending spokes 17 each having a length within the range of from about 0.5 cm to about 2 cm from a hub 16. In one embodiment, the spokes have an axial length of about 1.5 cm. Depending upon the desired introduction crossing profile of the collapsed occlusion device 10, as well as structural strength requirements in the deployed device, anywhere within the range of from about 3 spokes to about 40 spokes may be utilized. In some embodiments, anywhere from about 12 to about 24 spokes are utilized, and, 18 spokes are utilized in one embodiment.

The spokes are advanceable from a generally axially extending orientation such as to fit within a tubular introduction catheter to a radially inclined orientation as illustrated in FIG. 24 and FIG. 25 following deployment from the catheter. In a self-expandable embodiment, the spokes are biased radially outwardly such that the occlusion member expands to its enlarged, implantation cross-section under its own bias following deployment from the catheter. Alternatively, the occlusion member may be enlarged using any of a variety of enlargement structures such as an inflatable balloon.

Preferably, the spokes comprise a metal such as stainless steel, Nitinol, Elgiloy, or others which can be determined through routine experimentation by those of skill in the art. Wires having a circular or rectangular cross-section may be utilized depending upon the manufacturing technique. In one embodiment, rectangular cross section spokes are cut such as by known laser cutting techniques from tube stock, a portion of which forms the hub 16.

The barrier 15 may comprise any of a variety of materials which facilitate cellular in-growth, such as ePTFE. The suitability of alternate materials for barrier 15 can be determined through routine experimentation by those of skill in the art. The barrier 15 may be provided on either one or both sides of the occlusion member. In one embodiment, the barrier 15 comprises two layers, with one layer on each side of the frame 14. The two layers may be bonded to each other around the spokes 17 in any of a variety of ways, such as by heat bonding with or without an intermediate bonding layer

such as polyethylene or FEP, adhesives, sutures, and other techniques which will be apparent to those of skill in the art in view of the disclosure herein. The barrier 15 preferably has a thickness of no more than about 0.003" and a porosity within the range of from about 5 μ m to about 60 μ m.

5 The barrier 15 in one embodiment preferably is securely attached to the frame 14 and retains a sufficient porosity to facilitate cellular ingrowth and/or attachment. One method of manufacturing a suitable composite membrane barrier 15 is illustrated in Figures 36-39. As illustrated schematically in Figure 36, a bonding layer 254 preferably comprises a mesh or other porous structure having an open surface area within the range
10 of from about 10% to about 90%. Preferably, the open surface area of the mesh is within the range of from about 30% to about 60%. The opening or pore size of the bonding layer 254 is preferably within the range of from about 0.005 inches to about 0.050 inches, and, in one embodiment, is about 0.020 inches. The thickness of the bonding layer 254 can be varied widely, and is generally within the range of from about
15 0.0005 inches to about 0.005 inches. In a preferred embodiment, the bonding layer 254 has a thickness of about 0.001 to about 0.002 inches. One suitable polyethylene bonding mesh is available from Smith and Nephew, under the code SN9.

Referring to Figure 37, the bonding layer 254 is preferably placed adjacent one or both sides of a spoke or other frame element 14. The bonding layer 254 and frame 14
20 layers are then positioned in-between a first membrane 250 and a second membrane 252 to provide a composite membrane stack. The first membrane 250 and second 252 may comprise any of a variety of materials and thicknesses, depending upon the desired functional result. Generally, the membrane has a thickness within the range of from about 0.0005 inches to about 0.010 inches. In one embodiment, the membranes 250 and
25 252 each have a thickness on the order of from about 0.001 inches to about 0.002 inches, and comprise porous ePTFE, having a porosity within the range of from about 10 microns to about 100 microns.

The composite stack is heated to a temperature of from about 200° to about 300°, for about 1 minute to about 5 minutes under pressure to provide a finished
30 composite membrane assembly with an embedded frame 14 as illustrated schematically in Figure 38. The final composite membrane has a thickness within the range of from

about 0.001 inches to about 0.010 inches, and, preferably, is about 0.002 to about 0.003 inches in thickness. However, the thicknesses and process parameters of the foregoing may be varied considerably, depending upon the materials of the bonding layer 254 the first layer 250 and the second layer 252.

5 As illustrated in top plan view in Figure 39, the resulting finished composite membrane has a plurality of “unbonded” windows or areas 256 suitable for cellular attachment and/or ingrowth. The attachment areas 256 are bounded by the frame 14 struts, and the cross-hatch pattern formed by the bonding layer 254. In the illustrated embodiment, the filaments of the bonding layer 254 are oriented in a nonparallel
10 relationship with the struts of frame 14, and, in particular, at an angle within the range of from about 15° to about 85° from the longitudinal axis of the struts. Preferably, a regular window 256 pattern is produced.

The foregoing procedure allows the bonding mesh to flow into the first and second membranes 250 and 252 and gives the composite membrane 15 greater strength (both tensile and tear strength) than the components without the bonding mesh. The composite allows uniform bonding while maintaining porosity of the membrane 15, to facilitate tissue attachment. By flowing the thermoplastic bonding layer into the pores of the outer mesh layers 250 and 252, the composite flexibility is preserved and the overall composite layer thickness can be minimized.

20 The occlusion device 10 may be further provided with a bulking element or stabilizer 194. The stabilizer 194 may be spaced apart along an axis from the occluding member 11. In the illustrated embodiment, a distal end 190 and a proximal end 192 are identified for reference. The designation proximal or distal is not intended to indicate any particular anatomical orientation or deployment orientation within the deployment
25 catheter. As shown in FIGS. 24 and 25, the stabilizer 194 is spaced distally apart from the occluding member 11.

For use in the LAA, the occluding member 11 has an expanded diameter within the range of from about 1 cm to about 5 cm, and, in one embodiment, about 3 cm. The axial length of the occluding member 11 in an expanded, unstressed orientation from the
30 distal end 192 to the proximal hub 16 is on the order of about 1 cm. The overall length of the occlusion device 10 from the distal end 192 to the proximal end 190 is within the

range of from about 1.5 cm to about 4 cm and, in one embodiment, about 2.5 cm. The axial length of the stabilizer 194 between distal hub 191 and proximal hub 16 is within the range of from about 0.5 cm to about 2 cm, and, in one embodiment, about 1 cm. The expanded diameter of the stabilizer 194 is within the range of from about 0.5 cm to about 2.5 cm, and, in one embodiment, about 1.4 cm. The outside diameter of the distal hub 191 and proximal hub 16 is about 2.5 mm.

Preferably, the occlusion device 10 is provided with one or more retention structures for retaining the device in the left atrial appendage or other body lumen. In the illustrated embodiment, a plurality of barbs or other anchors 195 are provided, for engaging adjacent tissue to retain the occlusion device 10 in its implanted position and to limit relative movement between the tissue and the occlusion device. The illustrated anchors are provided on one or more of the spokes 17, or other portion of frame 14. Preferably, every spoke, every second spoke or every third spoke are provided with one or two anchors each. The illustrated anchor is in the form of a barb, for extending into tissue at or near the opening of the LAA.

One or more anchors 195 may also be provided on the stabilizer 194, such that it assists not only in orienting the occlusion device 10 and resisting compression of the LAA, but also in retaining the occlusion device 10 within the LAA. Any of a wide variety of structures may be utilized for anchor 195, either on the occluding member 11 or the stabilizer 194 or both, such as hooks, barbs, pins, sutures, adhesives and others which will be apparent to those of skill in the art in view of the disclosure herein.

In use, the occlusion device 10 is preferably positioned within a tubular anatomical structure to be occluded such as the left atrial appendage such that the occluding member 11 is positioned across or near the opening to the LAA and the stabilizer 194 is positioned within the LAA. The stabilizer 194 assists in the proper location and orientation of the occluding member 11, as well as resists compression of the LAA behind the occluding member 11. The present inventors have determined that following deployment of an occluding member 11 without a stabilizer 194 or other bulking structure to resist compression of the LAA, normal operation of the heart may cause compression and resulting volume changes in the LAA, thereby forcing fluid past the occluding member 11 and inhibiting or preventing a complete seal. Provision of a

stabilizer 194 dimensioned to prevent the collapse or pumping of the LAA thus minimize leakage, and provision of the barbs facilitates endothelialization or other cell growth across the occluding member 11.

For this purpose, the stabilizer 194 is preferably movable between a reduced cross-sectional profile for transluminal advancement into the left atrial appendage, and an enlarged cross-sectional orientation as illustrated to fill or to substantially fill a cross-section through the LAA. The stabilizing member may enlarge to a greater cross section than the anatomical cavity, to ensure a tight fit and minimize the likelihood of compression. One convenient construction includes a plurality of elements 196 which are radially outwardly expandable in response to axial compression of a distal hub 191 towards a proximal hub 16. Elements 196 each comprise a distal segment 198 and a proximal segment 202 connected by a bend 200. The elements 196 may be provided with a bias in the direction of the radially enlarged orientation as illustrated in FIG. 25, or may be radially expanded by applying an expansion force such as an axially compressive force between distal hub 191 and proximal hub 16 or a radial expansion force such as might be applied by an inflatable balloon. Elements 196 may conveniently be formed by laser cutting the same tube stock as utilized to construct the distal hub 191, proximal hub 16 and frame 14, as will be apparent to those of skill in the art in view of the disclosure herein. Alternatively, the various components of the occlusion device 10 may be separately fabricated or fabricated in subassemblies and secured together during manufacturing.

As a post implantation step for any of the occlusion devices disclosed herein, a radiopaque dye or other visualizable media may be introduced on one side or the other of the occlusion device, to permit visualization of any escaped blood or other fluid past the occlusion device. For example, in the context of a left atrial appendage application, the occlusion device may be provided with a capillary tube or aperture which permit introduction of a visualizable dye from the deployment catheter through the occlusion device and into the entrapped space on the distal side of the occlusion device. Alternatively, dye may be introduced into the entrapped space distal to the occlusion device such as by advancing a small gauge needle from the deployment catheter through the barrier 15 on the occlusion device, to introduce dye.

A further embodiment of the occlusion device 10 is illustrated in Figures 26-27. The occlusion device 10 comprises an occlusion member 11 and a stabilizing member 194 as in the previous embodiment. In the present embodiment, however, each of the distal segments 198 inclines radially outwardly in the proximal direction and terminates in a proximal end 204. The proximal end 204 may be provided with atraumatic configuration, for pressing against, but not penetrating, the wall of the left atrial appendage or other tubular body structure. Three or more distal segments 198 are preferably provided, and generally anywhere within the range of from about 6 to about 20 distal segments 198 may be used. In one embodiment, 9 distal segments 198 are provided. In this embodiment, 3 of the distal segments 198 have an axial length of about 5 mm, and 6 of the distal segments 198 have an axial length of about 1 cm. Staggering the lengths of the proximal segments 198 may axially elongate the zone in the left atrial appendage against which the proximal ends 204 provide anchoring support for the occlusion device.

The occlusion device 10 illustrated in Figures 26 and 27 is additionally provided with a hinge 206 to allow the longitudinal axis of the occlusion member 11 to be angularly oriented with respect to the longitudinal axis of the stabilizing member 194. In the illustrated embodiment, the hinge 206 is a helical coil, although any of a variety of hinge structures can be utilized. The illustrated embodiment may be conveniently formed by laser cutting a helical slot through a section of the tube from which the principal structural components of the occlusion device 10 are formed. At the distal end of the hinge 206, an annular band 208 connects the hinge 206 to a plurality of axially extending struts 210. In the illustrated embodiment 210, three axial struts 210 are provided, spaced equilaterally around the circumference of the body. Axial struts 210 may be formed from a portion of the wall of the original tube stock, which portion is left in its original axial orientation following formation of the distal segments 198 such as by laser cutting from the tubular wall.

The occlusion member 11 is provided with a proximal zone 212 on each of the spokes 17. Proximal zone 212 has an enhanced degree of flexibility, to accommodate the fit between the occlusion member 11 and the wall of the left atrial appendage. Proximal section 212 may be formed by reducing the cross sectional area of each of the

spokes 17, or by increasing the length of each spoke by making a wave pattern as illustrated.

Each of the spokes 17 terminates in a proximal point 214. Proximal point 214 may be contained within layers of the barrier 15, or may extend through or beyond the barrier 15 such as to engage adjacent tissue and assist in retaining the occlusion device 10 at the deployment site.

Referring to Figures 28 and 29, a further variation on the occlusion device 10 illustrated in Figures 24 and 25 is provided. The occlusion device 10 is provided with a proximal face 216 on the occlusion member 11, instead of the open and proximally concave face on the embodiment of Figures 24 and 25. The proximal face 216 is formed by providing a proximal spoke 218 which connects at an apex 220 to each distal spoke 17. Proximal spokes 218 are each attached to a hub 222 at the proximal end 192 of the occlusion device 10. The barrier 15 may surround either the proximal face or the distal face or both on the occlusion member 11. In general, provision of a proximal spoke 218 connected by an apex 220 to a distal spoke 17 provides a greater radial force than a distal spoke 17 alone, which will provide an increased resistance to compression if the occlusion member 11 is positioned with the LAA.

Referring to Figures 30-35, an alternate embodiment of the occlusion device in accordance with the present invention is illustrated. In general, the occlusion device 10 comprises an occluding member but does not include a distinct stabilizing member as has been illustrated in connection with previous embodiments. Any of the embodiments previously disclosed herein may also be constructed using the occluding member only, and omitting the stabilizing member as will be apparent to those of skill in the art in view of the disclosure herein.

The occluding device 10 comprises a proximal end 192, a distal end 190, and a longitudinal axis extending therebetween. A plurality of supports 228 extend between a proximal hub 222 and a distal hub 191. At least two or three supports 228 are provided, and preferably at least about six. In one embodiment, eight supports 228 are provided. However, the precise number of supports 228 can be modified, depending upon the desired physical properties of the occlusion device 10 as will be apparent to those of

skill in the art in view of the disclosure herein, without departing from the present invention.

Each support 228 comprises a proximal spoke portion 218, a distal spoke portion 217, and an apex 220 as has been discussed. However, each of the proximal spoke 218, distal spoke 17 and apex 220 may be a region on an integral support 228, such as a continuous rib or frame member which extends in a generally curved configuration as illustrated with a concavity facing towards the longitudinal axis of the occlusion device 10. Thus, no distinct point or hinge at apex 220 is necessarily provided as is disclosed in previous embodiments, which include a hinged connection between proximal spoke 218 and distal spoke 17.

At least some of the supports 228, and, preferably, each support 228, is provided with one or two or more barbs 195. In the illustrated configuration, the occlusion device 10 is in its enlarged orientation, such as for occluding a left atrial appendage or other body cavity or lumen. In this orientation, each of the barbs 195 projects generally radially outwardly from the longitudinal axis, and are inclined in the proximal direction. In an embodiment where the barbs 195 and corresponding support 228 are cut from a single ribbon, sheet or tube stock, the barb 195 will incline radially outwardly at approximately a tangent to the curve formed by the support 228.

The occlusion device 10 illustrated in Figure 30 may be constructed in any of a variety of ways, as will become apparent to those of skill in the art in view of the disclosure herein. In one preferred method, the occlusion device 10 is constructed by laser cutting a piece of tube stock to provide a plurality of axially extending slots in-between adjacent supports 228. Similarly, each barb 195 can be laser cut from the corresponding support 228 or space in-between adjacent supports 228. The generally axially extending slots which separate adjacent supports 228 end a sufficient distance from each of the proximal end 192 and distal end 190 to leave a proximal hub 222 and a distal hub 191 to which each of the supports 228 will attach. In this manner, an integral cage structure may be formed. Alternatively, each of the components of the cage structure may be separately formed and attached together such as through soldering, heat bonding, adhesives, and other fastening techniques which are known in the art. A further method of manufacturing the occlusion device 10 is to laser cut a slot pattern on

a flat sheet of appropriate material, such as a flexible metal or polymer, as has been discussed in connection with previous embodiments. The flat sheet may thereafter be rolled about an axis and opposing edges bonded together to form a tubular structure.

The apex portion 220 which carries the barb 195 may be advanced from a low profile orientation in which each of the supports 228 extend generally parallel to the longitudinal axis, to an implanted orientation as illustrated, in which the apex 220 and the barb 195 are positioned radially outwardly from the longitudinal axis. The support 228 may be biased towards the enlarged orientation, or may be advanced to the enlarged orientation following positioning within the tubular anatomical structure, in any of a variety of manners. For example, referring to Figure 32, an inflatable balloon 230 is positioned within the occlusion device 10. Inflatable balloon 230 is connected by way of a removable coupling 232 to an inflation catheter 234. Inflation catheter 234 is provided with an inflation lumen for providing communication between an inflation media source 236 outside of the patient and the balloon 230. Following positioning within the target body lumen, the balloon 230 is inflated, thereby engaging barbs 195 with the surrounding tissue. The inflation catheter 234 is thereafter removed, by decoupling the removable coupling 232, and the inflation catheter 234 is thereafter removed.

In an alternate embodiment, the supports 228 are radially enlarged such as through the use of a deployment catheter 238. Deployment catheter 238 comprises a lumen for movably receiving a deployment line 240. Deployment line 240 extends in a loop 244 formed by a slip knot 242. As will be apparent from Figure 33, proximal retraction on the deployment line 240 will cause the distal hub 191 to be drawn towards the proximal hub 222, thereby radially enlarging the cross-sectional area of the occlusion device 10. Depending upon the material utilized for the occlusion device 10, the supports 228 will retain the radially enlarged orientation by elastic deformation, or may be retained in the enlarged orientation such as by securing the slip knot 242 immovably to the deployment line 240 at the fully radially enlarged orientation. This may be accomplished in any of a variety of ways, using additional knots, clips, adhesives, or other techniques known in the art.

Referring to Figures 34A and 34B, the occlusion device 10 may be provided with a barrier 15 such as a mesh or fabric as has been previously discussed. Barrier 15 may be provided on only one hemisphere such as proximal face 216, or may be carried by the entire occlusion device 10 from proximal end 192 to distal end 190. The barrier
5 may be secured to the radially inwardly facing surface of the supports 228, as illustrated in Figure 34B, or may be provided on the radially outwardly facing surfaces of supports 228, or both.

A further embodiment of the occlusion device 10 is illustrated in Figure 35, in which the apex 220 is elongated in an axial direction to provide additional contact area
10 between the occlusion device 10 and the wall of the tubular structure. In this embodiment, one or two or three or more anchors 195 may be provided on each support 228, depending upon the desired clinical performance. The occlusion device 10 illustrated in Figure 35 may also be provided with any of a variety of other features discussed herein, such as a partial or complete barrier 15 covering. In addition, the
15 occlusion device 10 illustrated in Figure 35 may be enlarged using any of the techniques disclosed elsewhere herein.

While particular forms of the invention have been described, it will be apparent that various modifications can be made without departing from the spirit and scope of the invention. Accordingly, it is not intended that the invention be limited, except as by
20 the appended claims.

WHAT IS CLAIMED IS:

1. An occlusion device, for implantation within a tubular structure in the body comprising:

an occluding member, enlargeable from a reduced cross section to an enlarged cross section; and

a stabilizing member, enlargeable from a reduced cross section to an enlarged cross section.

2. An occlusion device as in Claim 1, wherein the enlarged cross section of the stabilizing member is less than the enlarged cross section of the occlusion member.

3. An occlusion device as in Claim 1, further comprising a hub between the occlusion member and the stabilizing member.

4. An occlusion device as in Claim 1, wherein the occlusion member comprises an expandable frame.

5. An occlusion device as in Claim 4, wherein the frame comprises at least two spokes.

6. An occlusion device as in Claim 5, wherein at least one spoke has a first end and a second end, and the first end is attached to the hub.

7. An occlusion device as in Claim 1, wherein the stabilizing member comprises at least two elements which are movable from an axial orientation when the stabilizing member is in the reduced cross section to an inclined orientation when the stabilizing element is in the enlarged cross section.

8. An occlusion device as in Claim 7, wherein each element comprises a proximal section, a distal section, and a bend in between the proximal and distal sections when the stabilizing member is in the enlarged cross section.

9. An occlusion device as in Claim 7, wherein the elements comprise wire.

10. An occlusion device as in Claim 7, wherein the elements are cut from a tube.

11. An occlusion device as in Claim 1, further comprising at least one tissue attachment element on the occluding member or the stabilizing member or both.

12. An occlusion device as in Claim 11, wherein the tissue attachment structure comprises a tissue piercing element.

13. An occlusion device for occluding a tubular body structure, comprising:
a body, having a longitudinal axis;
an expandable occlusion member at a first position on the axis; and
a stabilizing member at a second position on the axis;
- 5 wherein the occlusion member comprises a plurality of spokes which are
hingably attached to the body and movable between an axial orientation and an
inclined orientation.
14. An occlusion device as in Claim 13, further comprising a membrane or
mesh carried by the spokes.
- 10 15. An occlusion device as in Claim 13, wherein the stabilizing member
comprises at least three radially outwardly moveable elements.
16. An occlusion device as in Claim 15, wherein the elements comprise
flexible metal.
17. An occlusion device as in Claim 13, further comprising a hinge on the
15 body between the occlusion member and the stabilizing member.
18. An occlusion device as in Claim 17, wherein the hinge comprises a coil.
19. A method of making an occlusion device, comprising the steps of:
providing a tube having a first end, a second end, and a longitudinal axis;
forming a plurality of axially extending slots at a first position on the
20 tube to create a first plurality of longitudinal elements; and
forming a second plurality of axially extending slots at a second position
on the tube to create a second plurality of longitudinal elements.
20. A method as in Claim 19, further comprising the step of providing a
radially outwardly directed bias on at least one of the first and second plurality of
25 elements.
21. A method as in Claim 19, further comprising the step of attaching a
membrane or mesh to at least one of the first and second plurality of elements.
22. A method as in Claim 19, further comprising the step of providing a
hinge on the tube in between the first and second plurality of elements.
- 30 23. A method as in Claim 22, wherein the providing a hinge step comprises
providing a spiral cut in the tube.

24. A method as in Claim 19, wherein the forming step comprises cutting with a laser or etching.

25. A method of occluding an atrial appendage, comprising the steps of:
introducing a stabilizing member into the appendage, for resisting
5 compression of the appendage wall; and
positioning an occlusion member across the appendage.

26. A method of occluding an atrial appendage as in Claim 25, wherein the introducing step comprises introducing a radially expandable stabilizing member and radially expanding the member within the appendage.

10 27. A method of occluding an atrial appendage as in Claim 25, wherein the positioning step comprises positioning the occlusion member within the appendage.

28. A method of occluding an atrial appendage as in Claim 25, wherein the positioning step comprises positioning the occlusion member across an opening of the appendage.

15 29. A method of occluding an atrial appendage as in Claim 25, wherein the introducing and positioning steps are accomplished by introducing a deployment catheter within the appendage and deploying the stabilizing member and occluding member from the catheter.

20 30. A method of occluding an atrial appendage as in Claim 25, further comprising the step of facilitating cell growth onto the occlusion member.

31. A method of occluding an atrial appendage, comprising the steps of:
inhibiting changes in the volume of the appendage; and
occluding the opening to the appendage.

25 32. A method of occluding an atrial appendage as in Claim 31, wherein the inhibiting changes in the volume step comprises introducing a bulking element into the appendage to resist compression of the appendage wall.

33. A method of occluding an atrial appendage as in Claim 32, wherein the introducing step comprises introducing an expandable bulking element into the appendage.

34. A method of occluding an atrial appendage as in Claim 33, wherein the introducing an expandable bulking element comprises deploying a self expandable bulking element from a deployment catheter.

35. A method of occluding an atrial appendage as in Claim 31, wherein the occluding step comprises positioning an occlusion element to enclose the bulking element within the appendage.

36. A method of facilitating cell growth onto an atrial appendage occlusion device, comprising the steps of:

positioning an occlusion device across the opening of the appendage, the occlusion device having a tissue attachment surface thereon; and

resisting compression of the appendage at least during a tissue attachment period of time.

37. A method of facilitating cell growth as in Claim 36, wherein the resisting step comprises positioning a bulking structure within the appendage.

38. An occlusion device, for occluding a hollow body structure, comprising: a proximal end, a distal end, and a longitudinal axis extending therethrough;

at least three supports extending between the proximal end and the distal end;

each support comprising an elongate, flexible element which is movable from a first orientation in which the element extends substantially parallel to the axis at no more than a first distance from the axis, to a second orientation in which at least a portion of the element is inclined with respect to the axis and is separated by at least a second distance from the axis which is greater than the first distance.

39. An occlusion device a in Claim 38, comprising at least five supports.

40. An occlusion device a in Claim 38, comprising from about five supports to about twenty supports.

41. An occlusion device as in Claim 38, further comprising a proximal hub at the proximal end and a distal hub at the distal end.

42. An occlusion device as in Claim 41, wherein the supports and the proximal hub and the distal hub are formed from a tube.

43. An occlusion device as in Claim 41, wherein the supports and the proximal hub and the distal hub are formed from a sheet.

5 44. An occlusion device as in Claim 38, further comprising at least one barb on each support.

45. An occlusion device as in Claim 40, further comprising at least one barb on each of at least two supports.

10 46. An occlusion device as in Claim 38, further comprising a barrier layer carried by the supports.

47. A method of occluding a hollow body structure, comprising:

 providing an occlusion device comprising a proximal end, a distal end, and a longitudinal axis extending therethrough, and at least three supports extending between the proximal end and the distal end;

15 positioning the occlusion device within the hollow body structure; and

 axially shortening the occlusion device along the longitudinal axis to radially outwardly advance the supports to engage the hollow body structure.

48. A method of occluding a hollow body structure, comprising:

20 providing an occlusion device comprising a tubular body having a plurality of axially extending slots which define a plurality of axially extending supports;

 positioning the occlusion device within the hollow body structure; and

 radially outwardly advancing the supports to engage the hollow body structure.

25 49. A method of occluding a hollow body structure as in Claim 48, wherein the radially outwardly advancing step comprises inflating a balloon positioned within the tubular body.

50. A method of occluding a hollow body structure as in Claim 48, wherein the radially outwardly advancing step comprises axially compressing the tubular body.

30 51. An occlusion device, for implantation with in a tubular structure in the body, comprising:

an occluding member comprising at least three spokes which are movable from a reduced cross-section to an enlarged cross-section, the spokes movable from an axial orientation when the occluding member is in the reduced cross-section to an inclined orientation when the occluding member is in the enlarged cross-section.

52. An occlusion device as in Claim 51, further comprising at least one hub on the occlusion member for holding the spokes.

53. An occlusion device as in Claim 51, wherein the occluding member comprises at least eight spokes.

54. An occlusion device as in Claim 52, wherein at least one spoke has a first end and a second end, and the first end is attached to the hub.

55. An occlusion device as in Claim 51, wherein each spoke comprises a proximal section, a distal section, and a bend in between the proximal and distal sections when the occluding member is in the enlarged cross-section.

56. An occlusion device as in Claim 51, wherein the spokes comprise wire.

57. An occlusion device as in Claim 51, wherein the spokes are cut from a tube.

58. An occlusion device as in Claim 51, further comprising at least one tissue attachment element on the occluding member.

59. An occlusion device as in Claim 58, wherein the tissue attachment structure comprises a tissue piercing element.

60. An occlusion device as in Claim 59, comprising at least one barb on each spoke.




METHOD AND DEVICE FOR LEFT ATRIAL APPENDAGE OCCLUSION



Abstract of the Disclosure



Disclosed is an occlusion device for use in a body lumen such as the left atrial appendage. The occlusion device includes an occlusion member and may also include a
5 stabilizing member. The stabilizing member inhibits compression of the left atrial appendage, facilitating tissue in-growth onto the occlusion member. Methods are also disclosed.

10 H:\DOCS\GVH\GVH-1587.DOC:df3/jt3
110899

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2

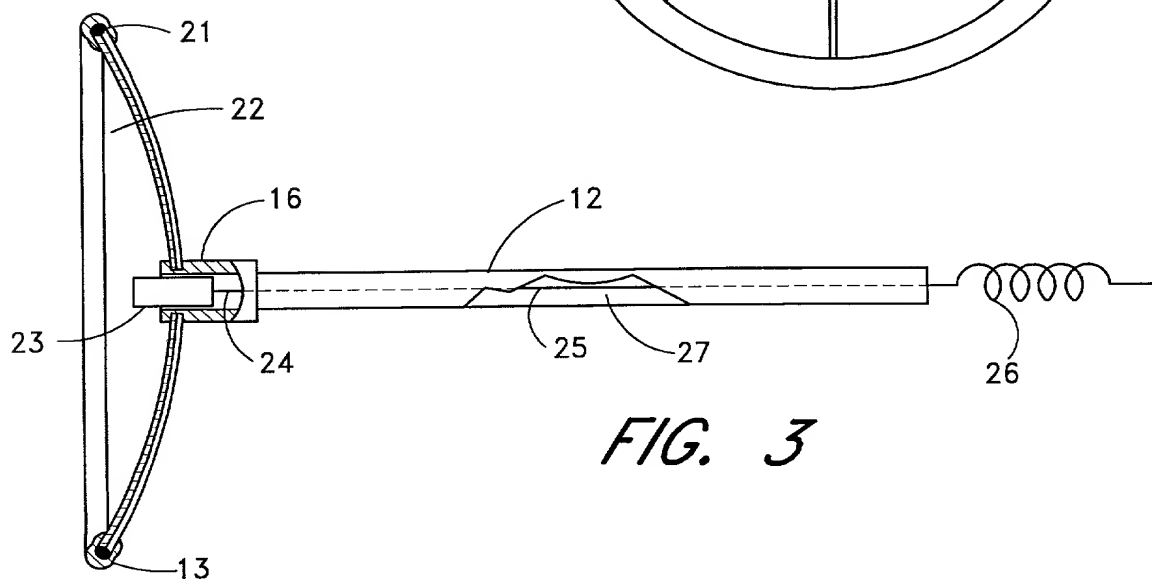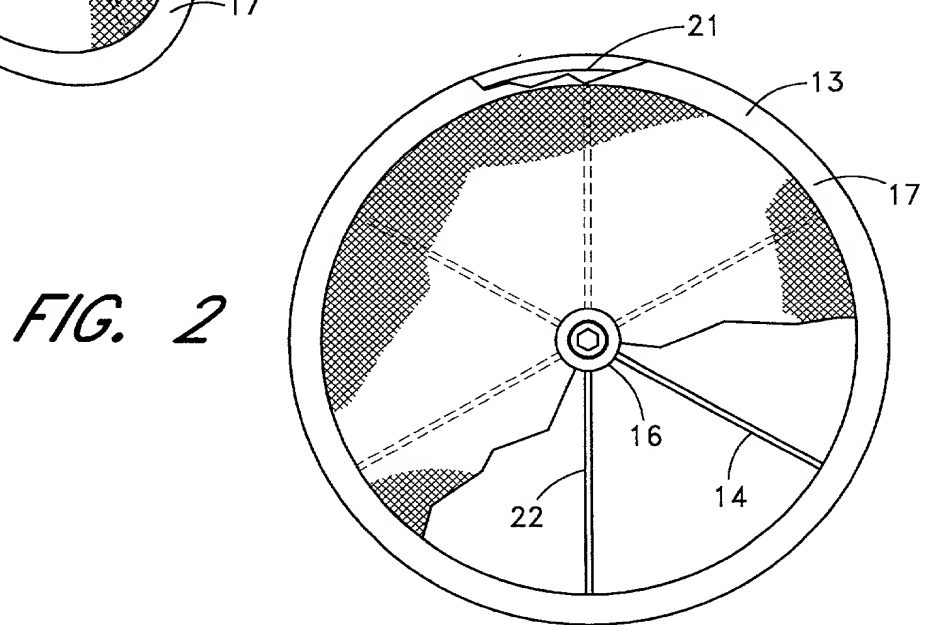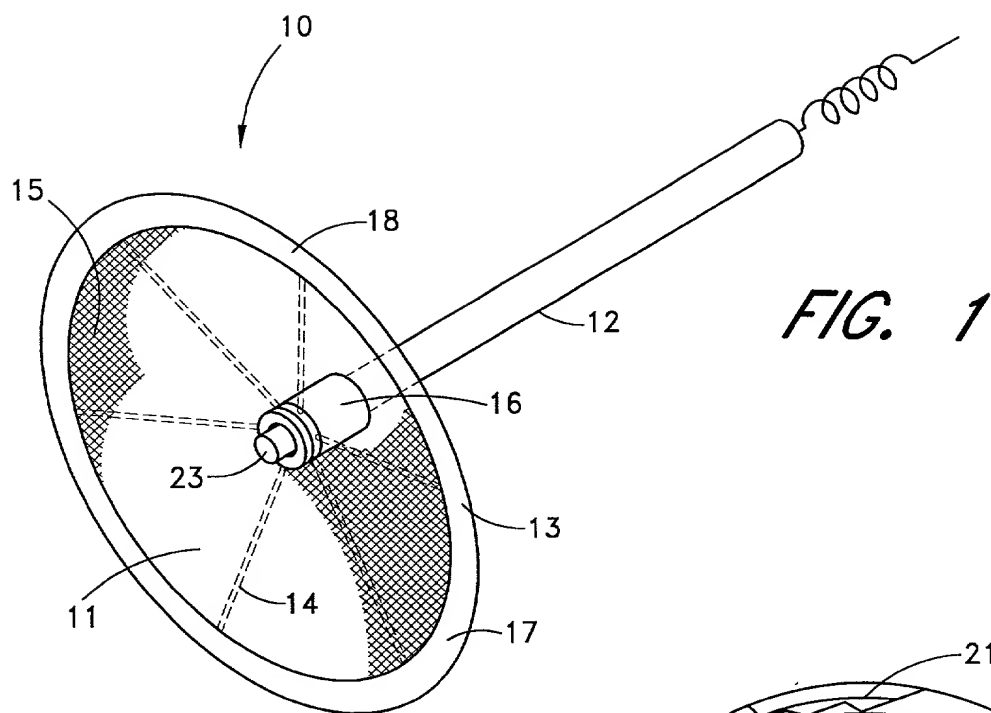

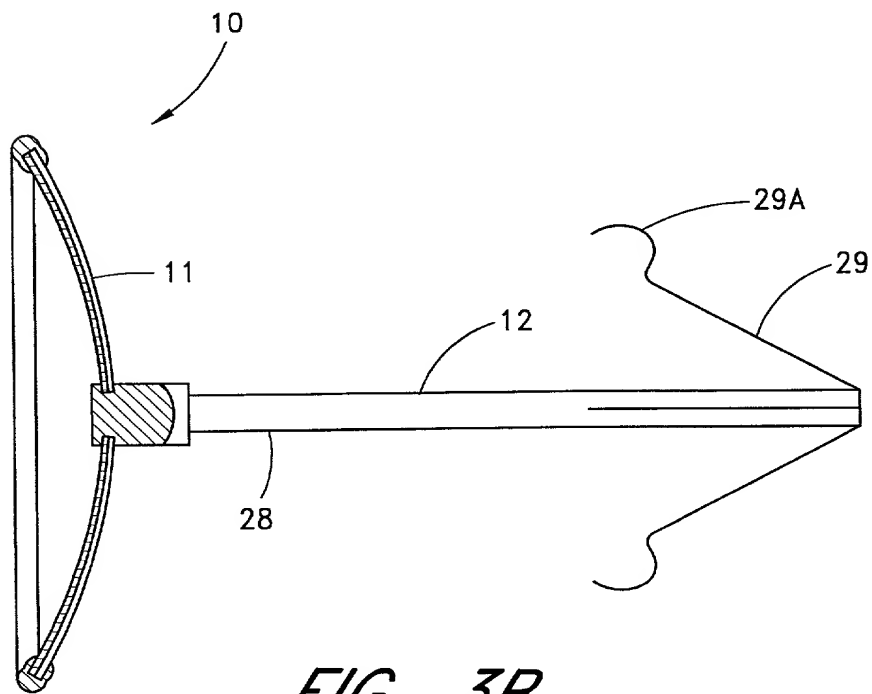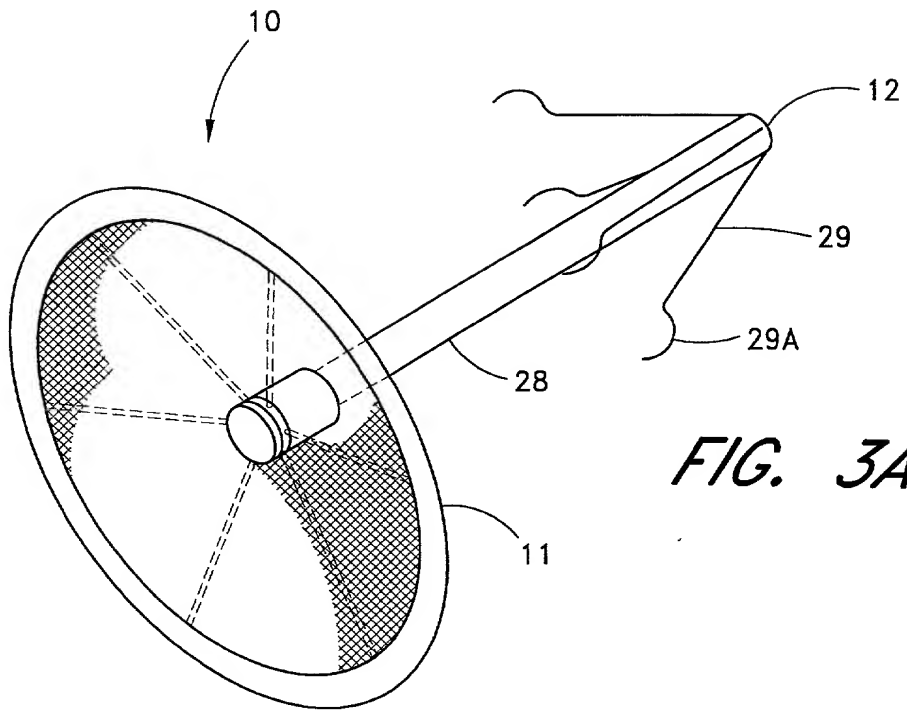

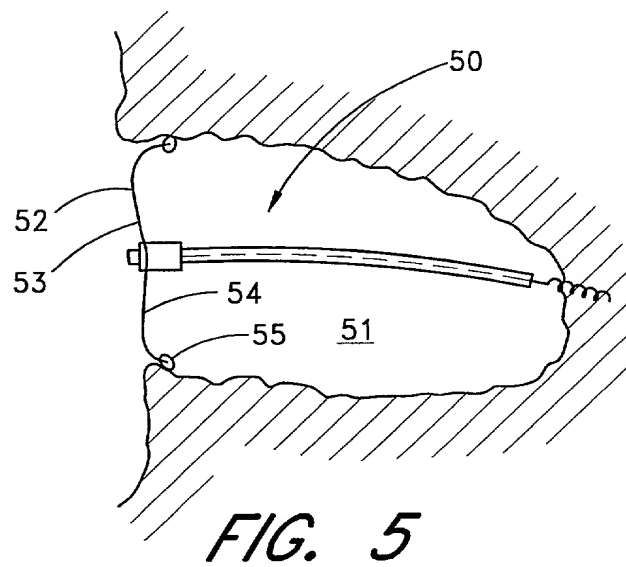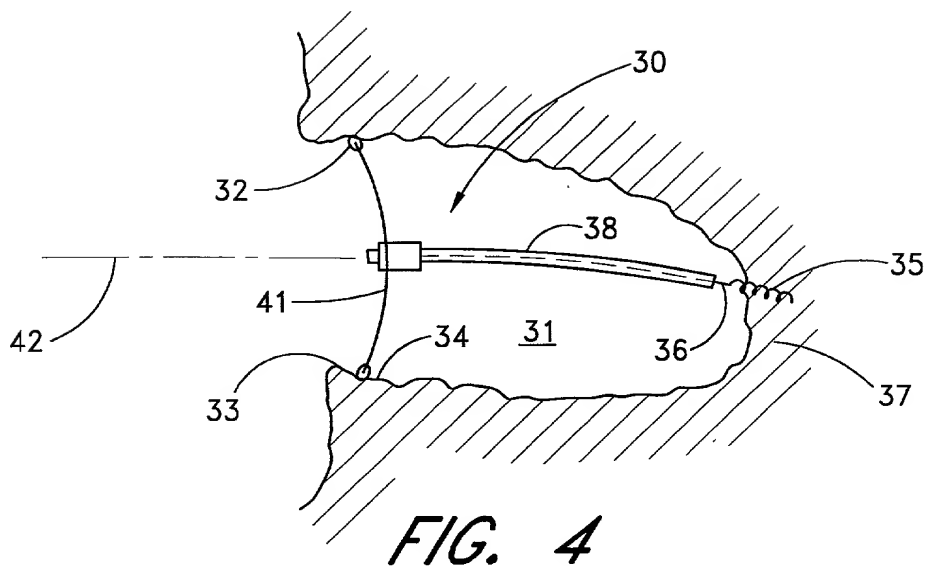

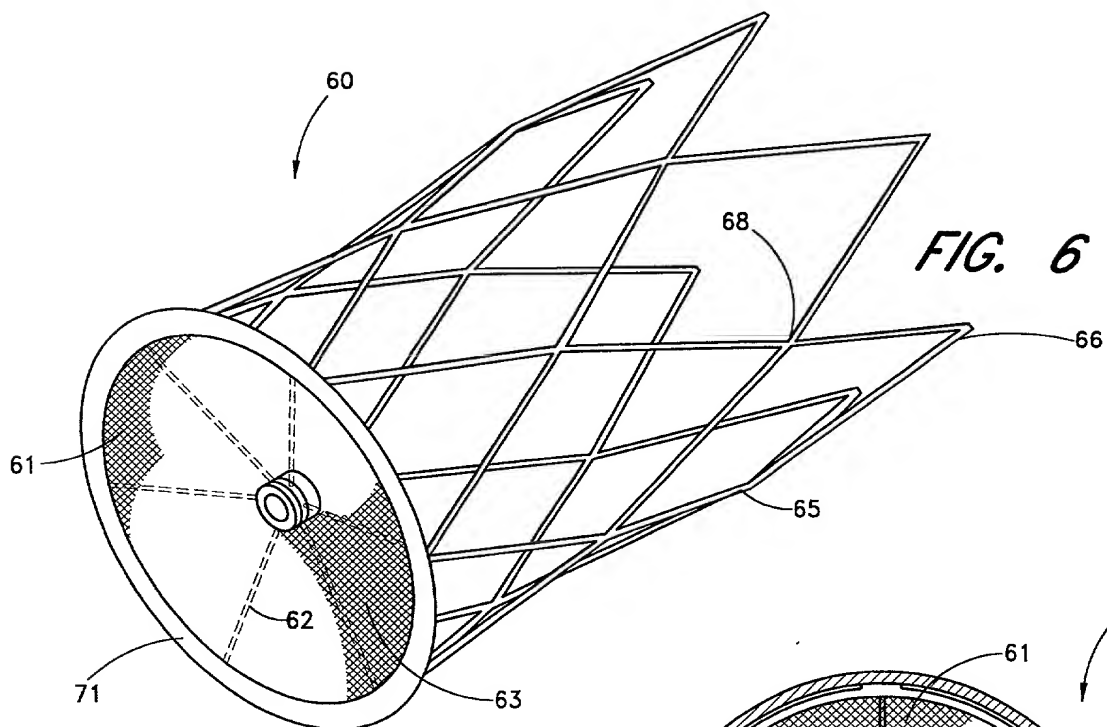
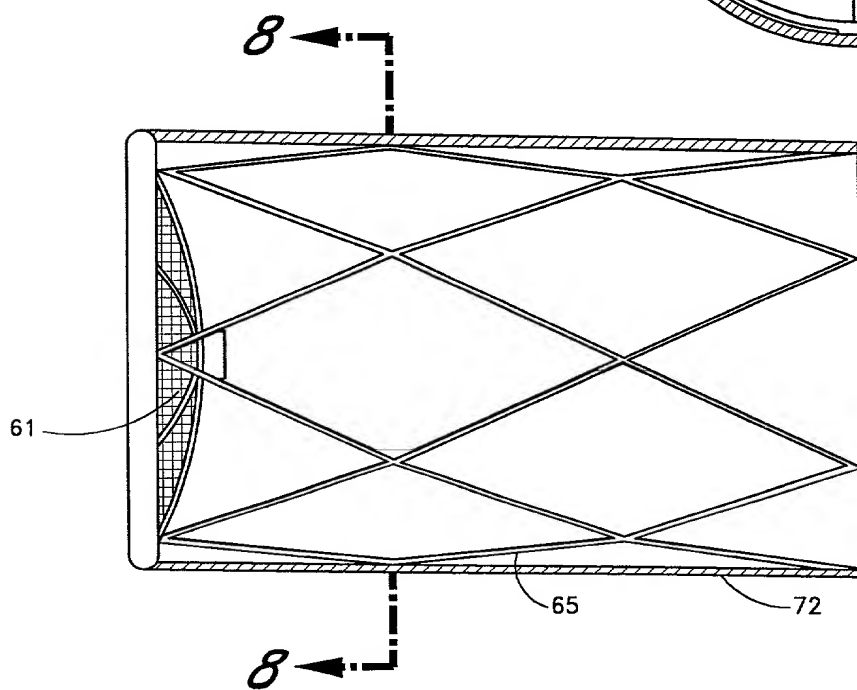
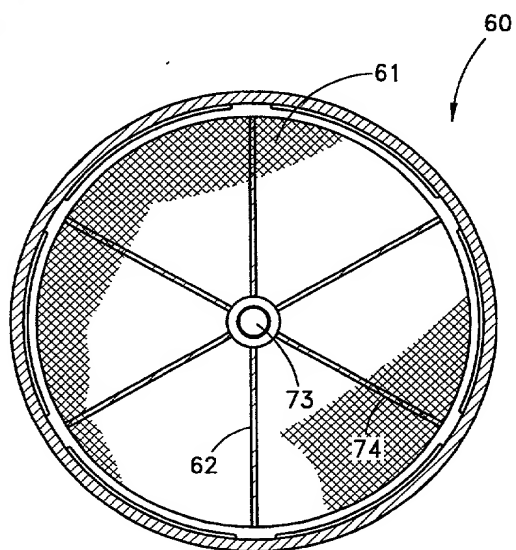
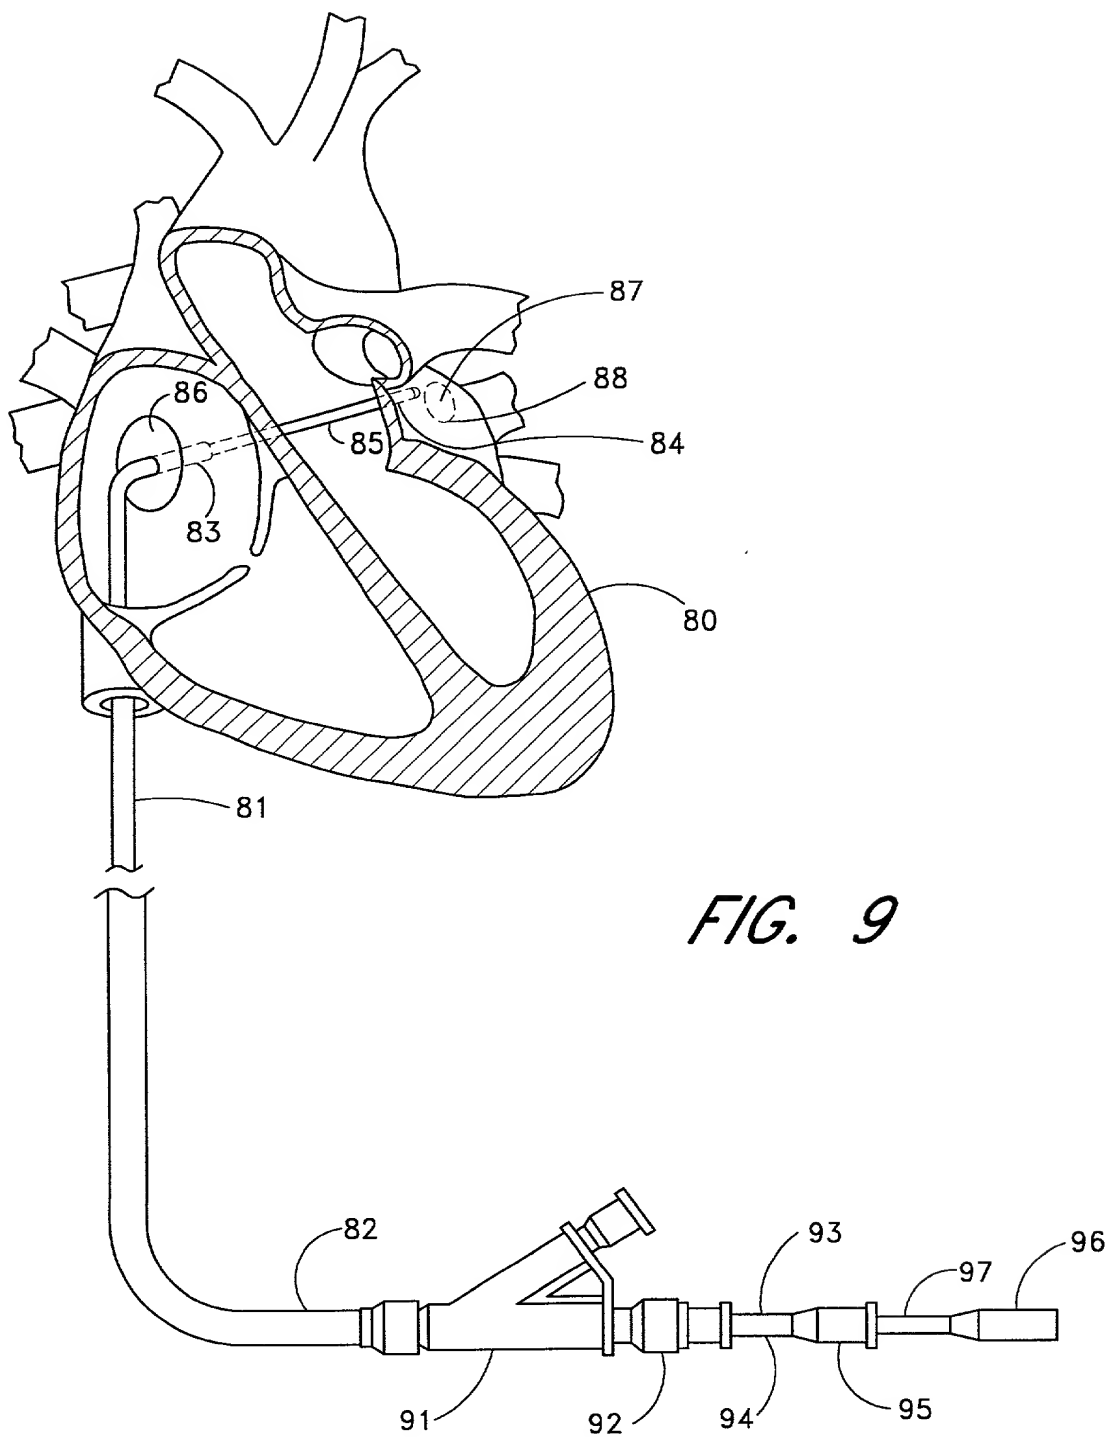


FIG. 8





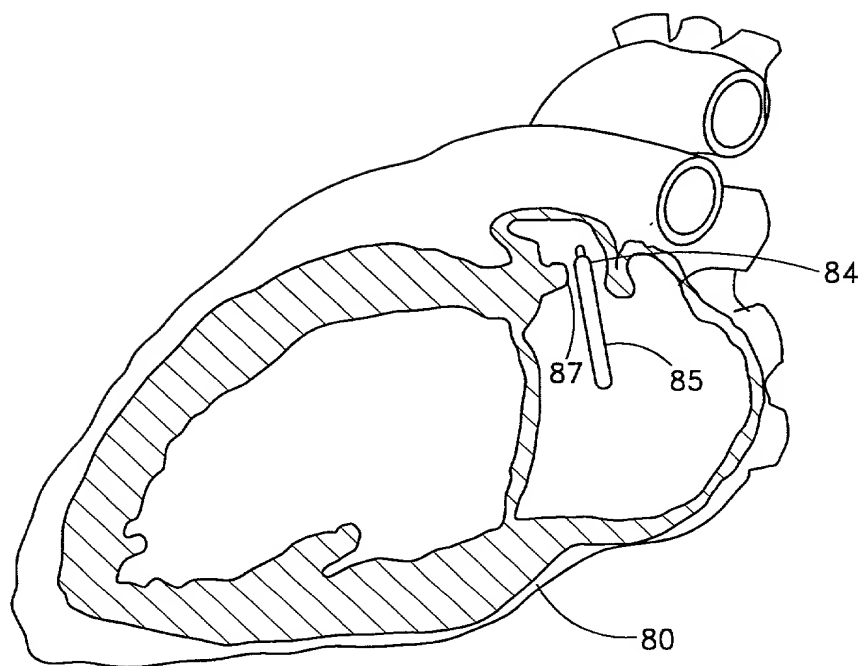


FIG. 10

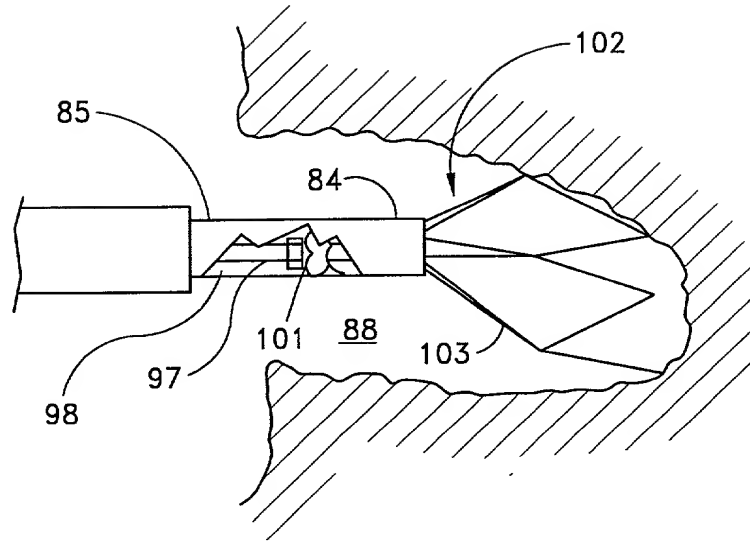


FIG. 11

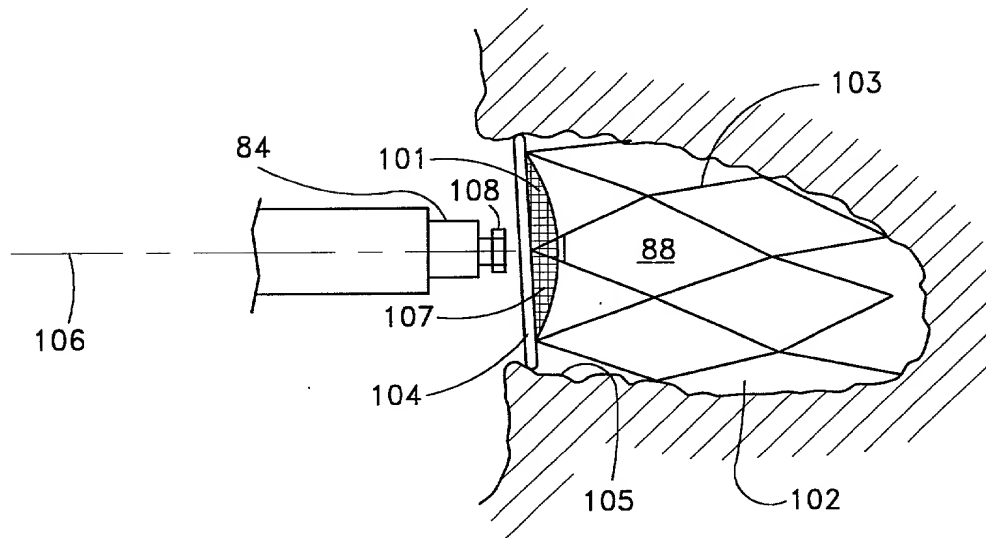


FIG. 12

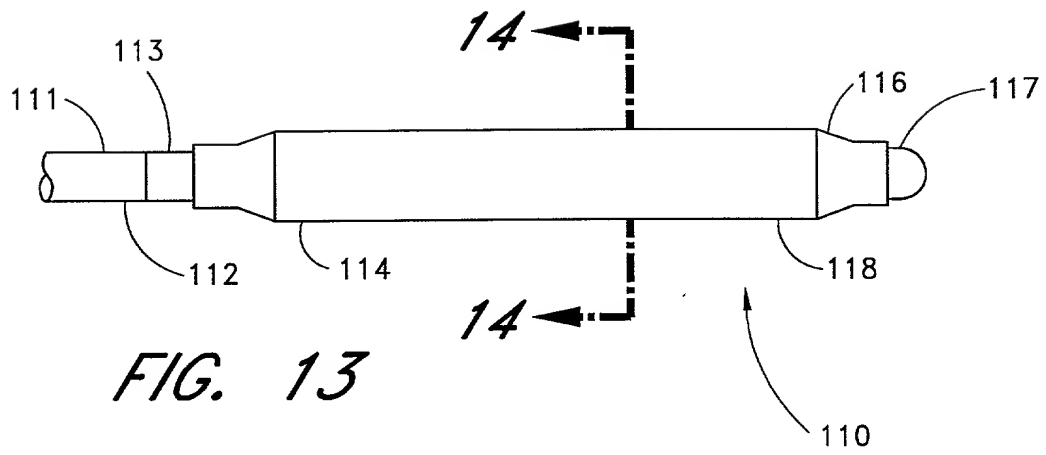


FIG. 13




FIG. 14

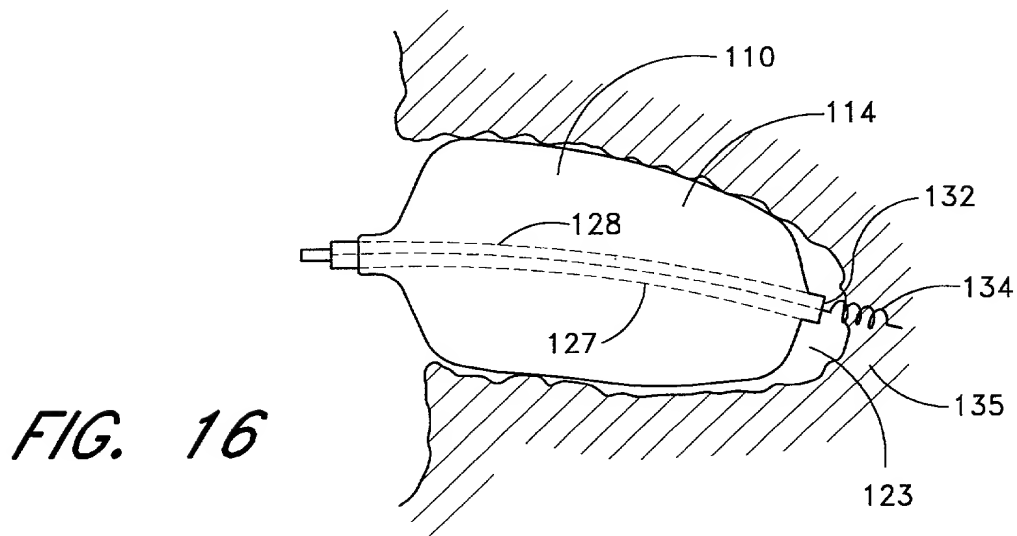
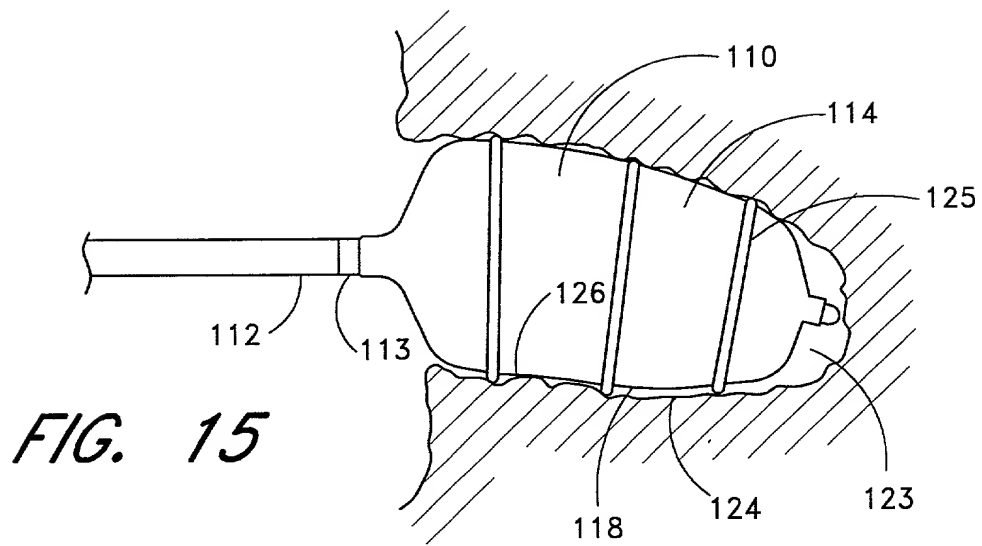


FIG. 17

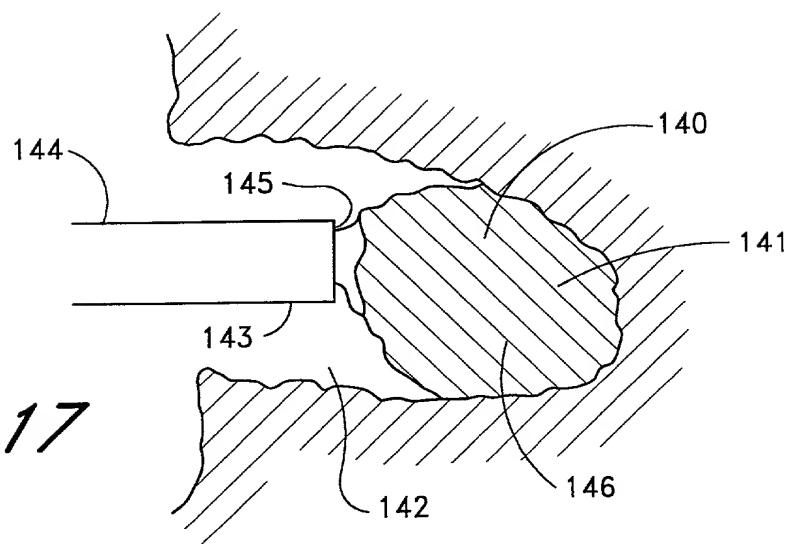


FIG. 18

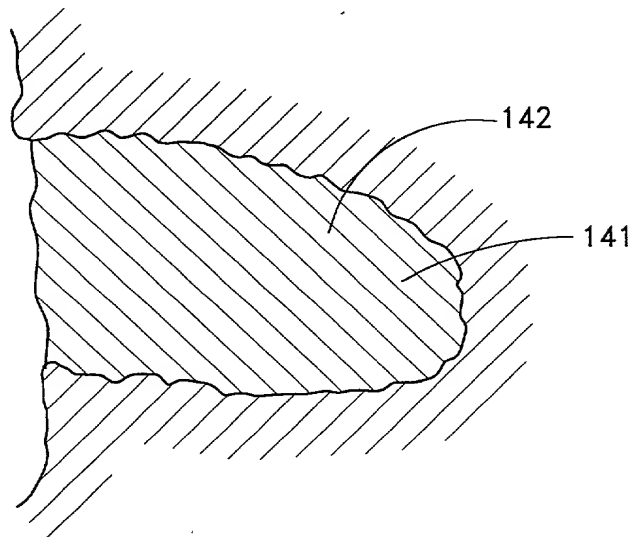
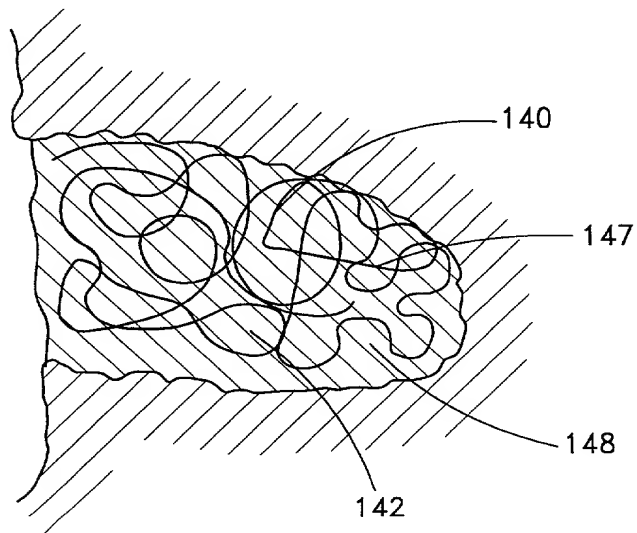


FIG. 19



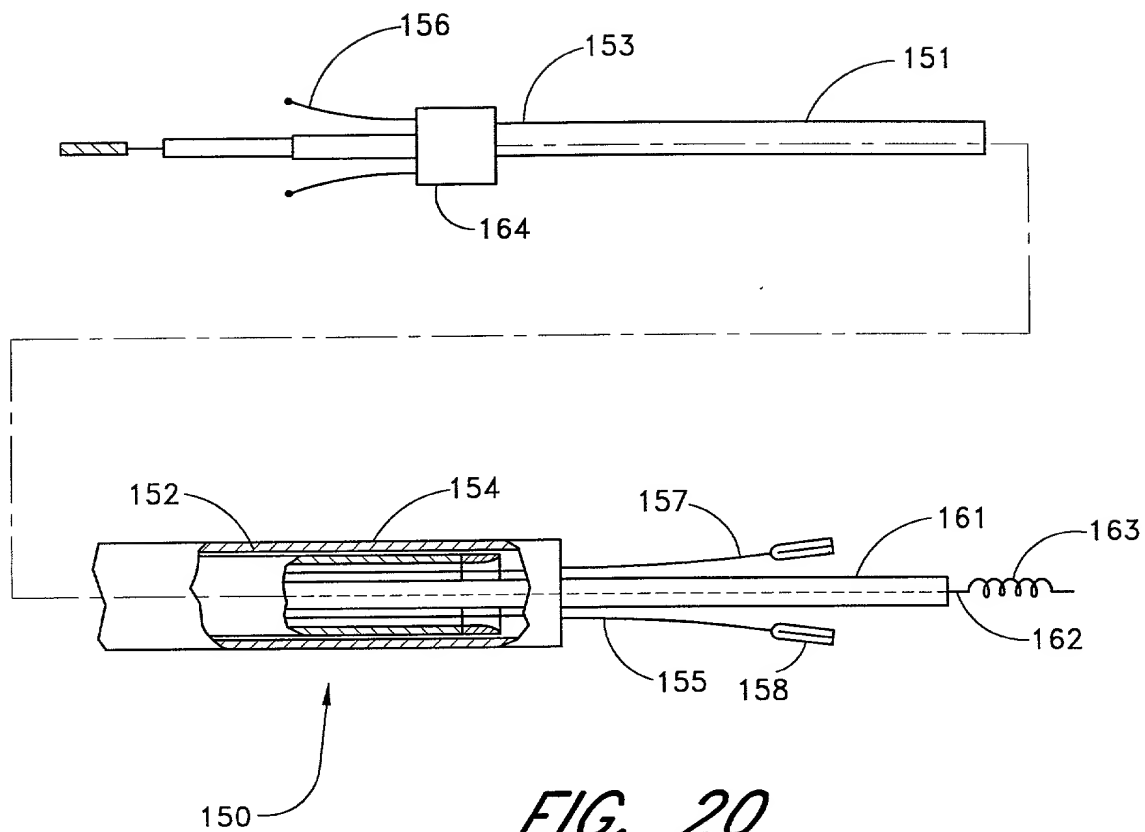


FIG. 20

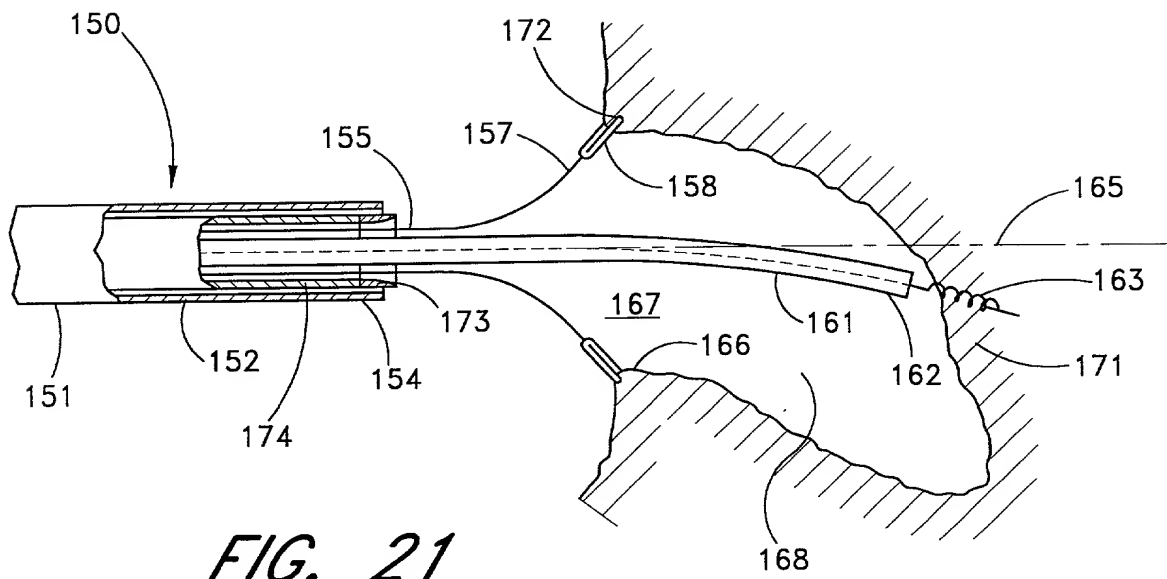


FIG. 21

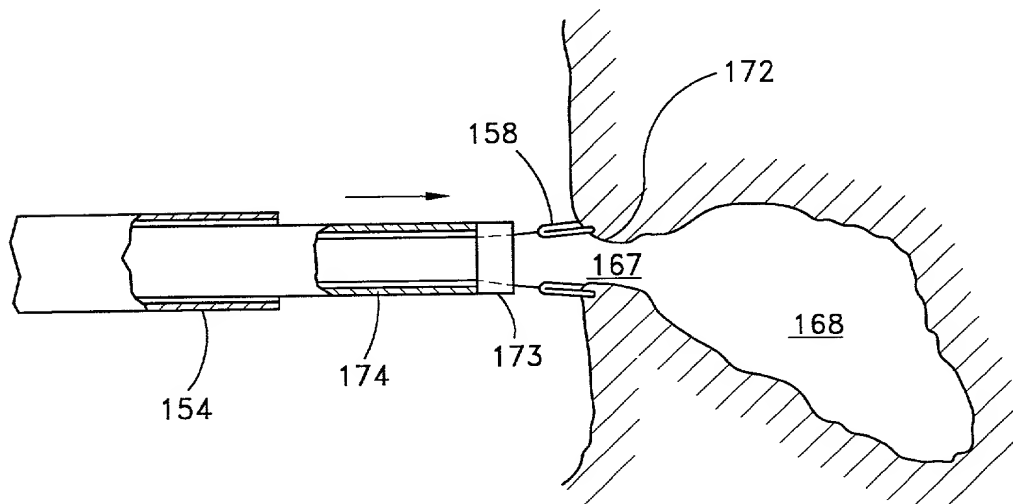


FIG. 22

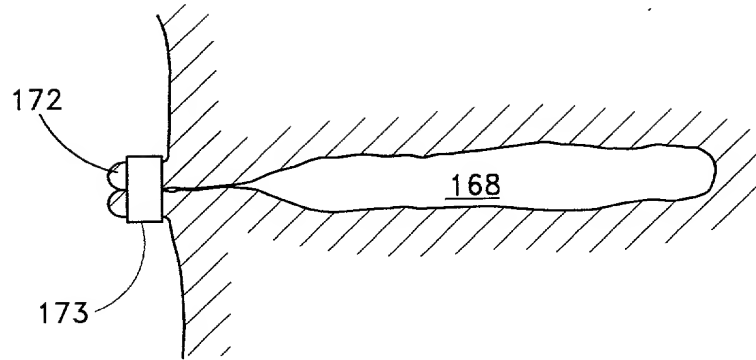


FIG. 23

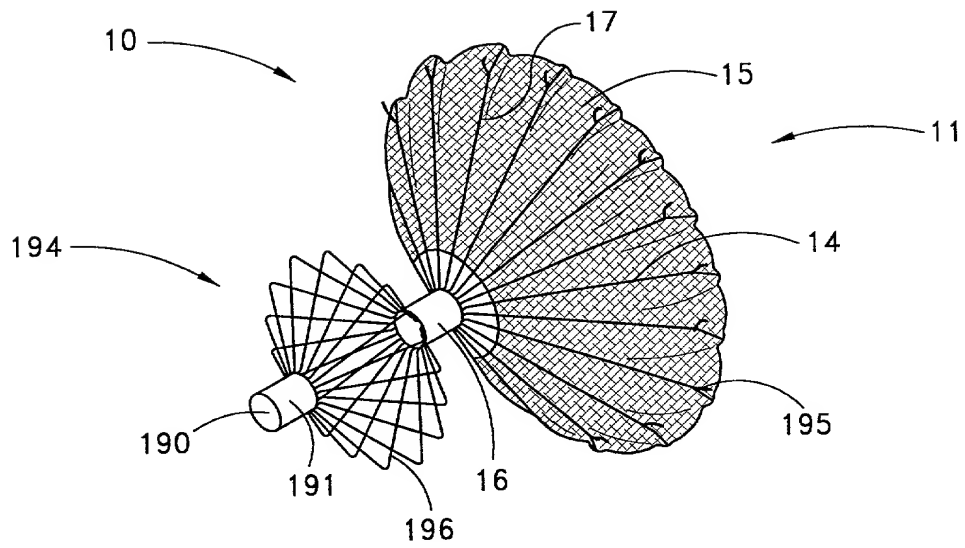


FIG. 24

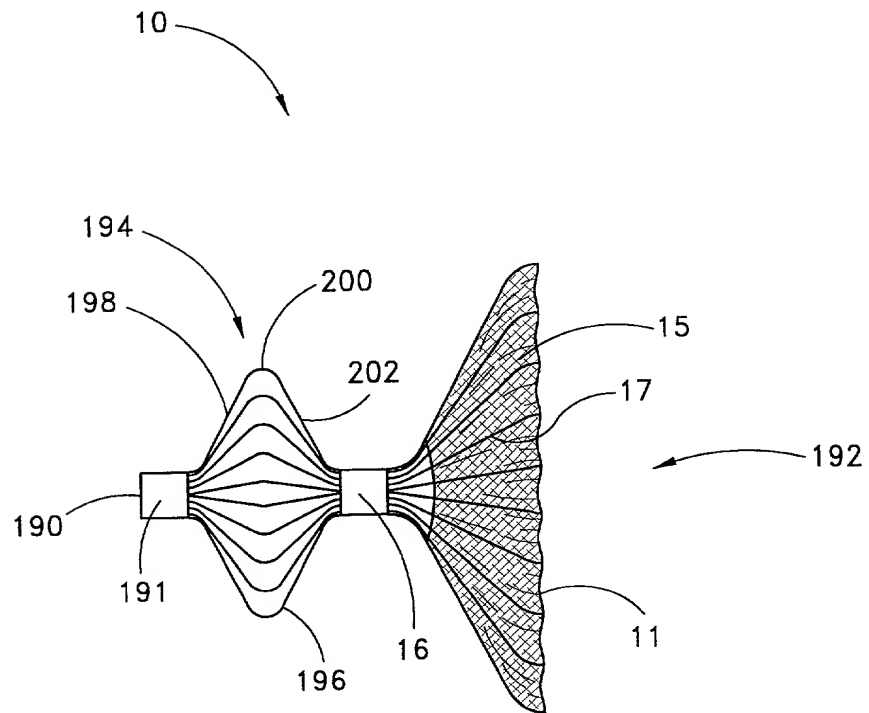


FIG. 25

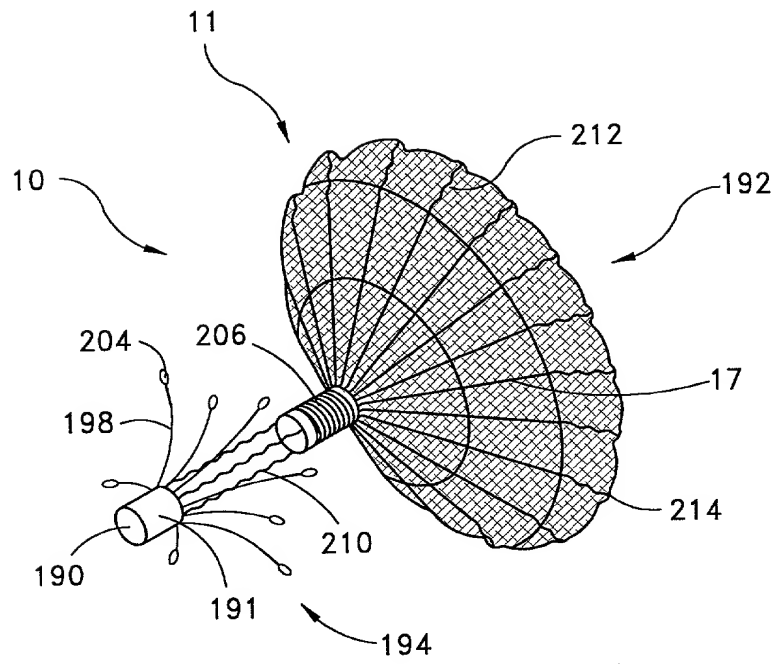


FIG. 26

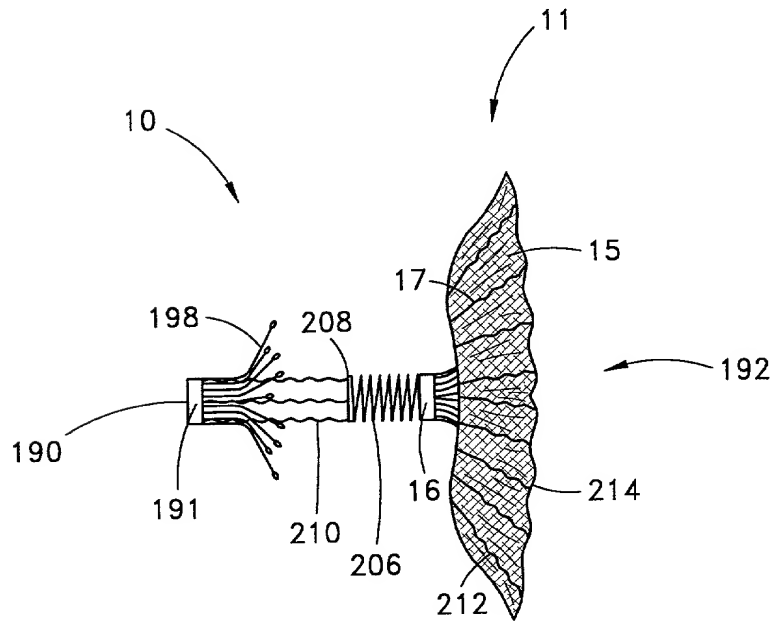


FIG. 27

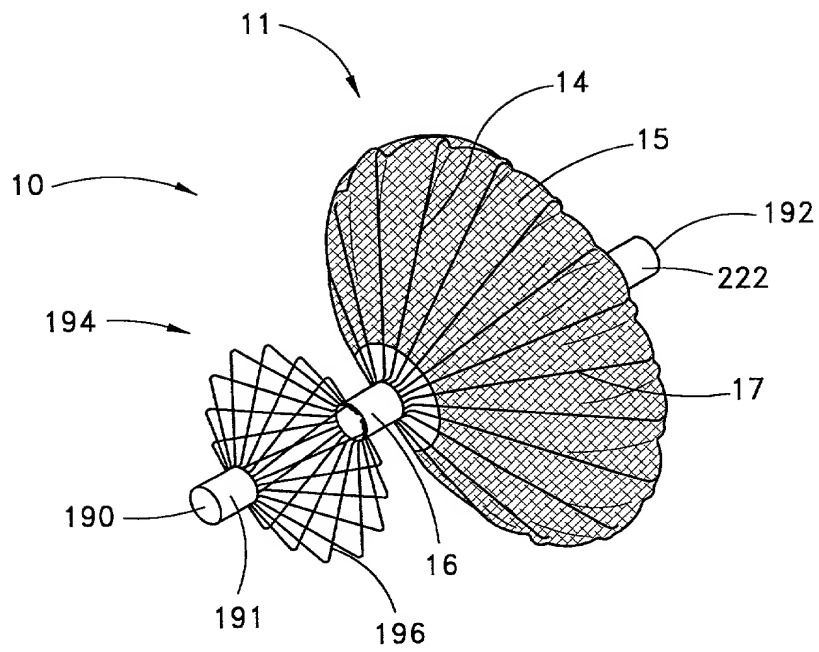


FIG. 28

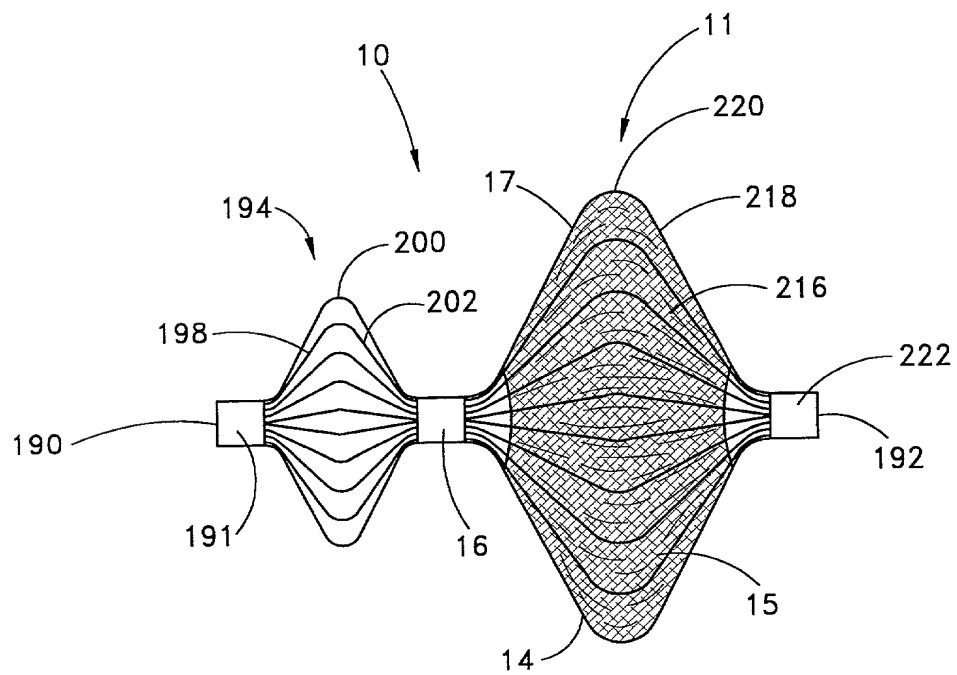
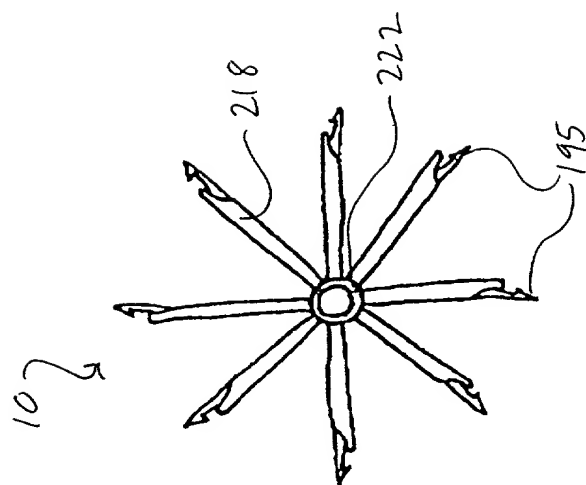
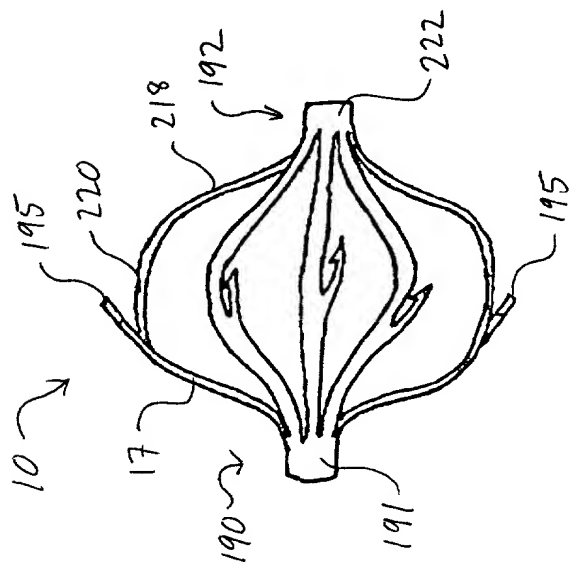
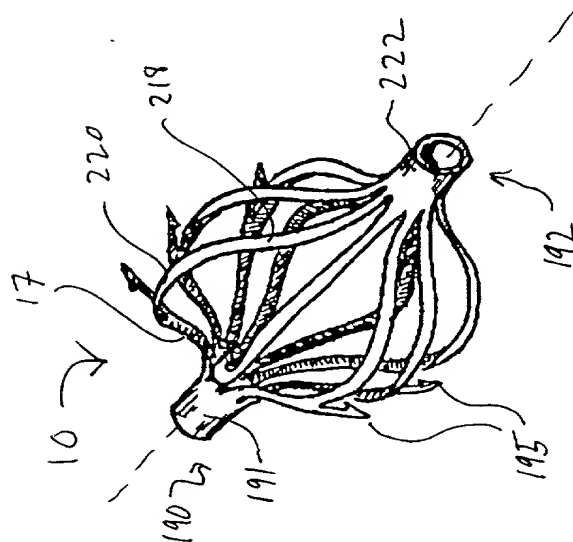
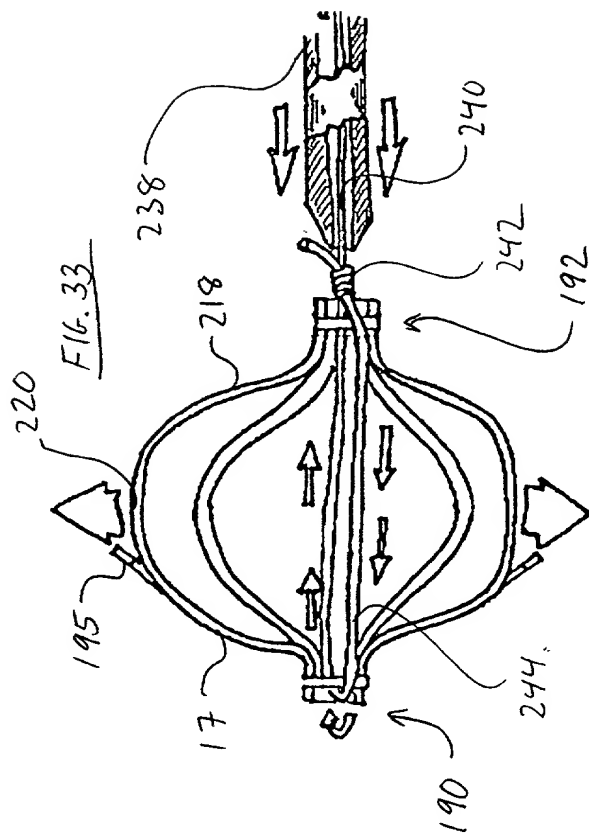
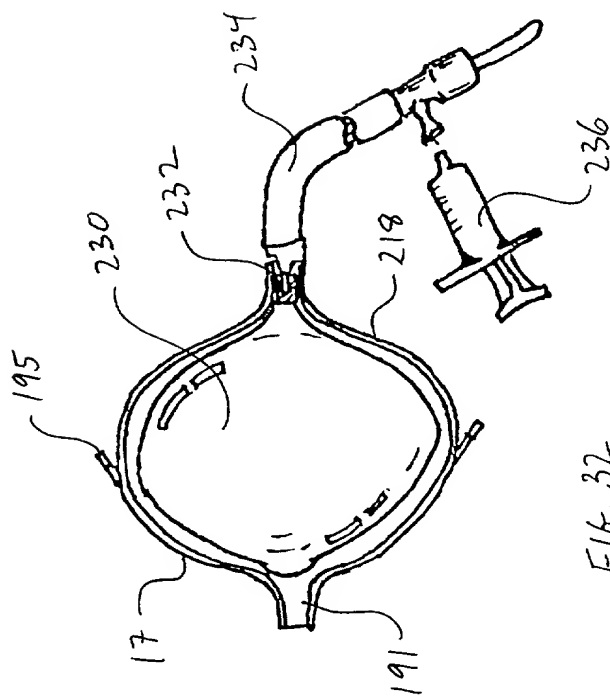


FIG. 29





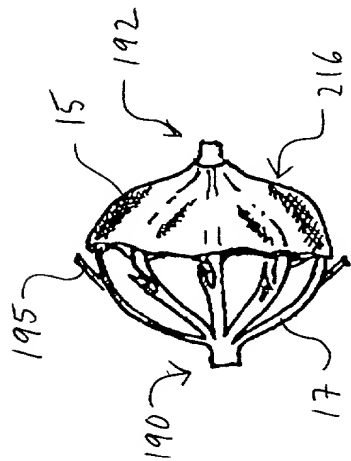


FIG-34A

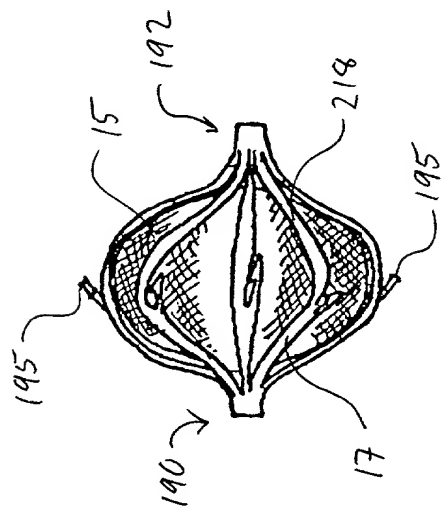


FIG 34B

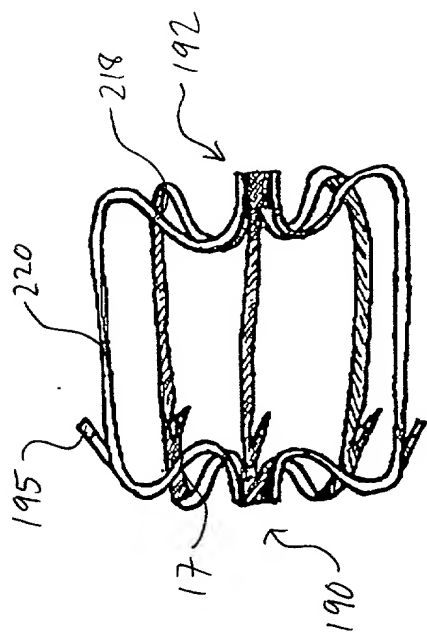


FIG. 35

FIG. 36

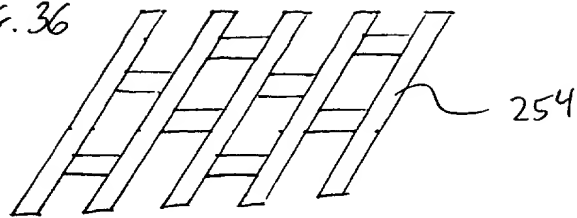


FIG. 37

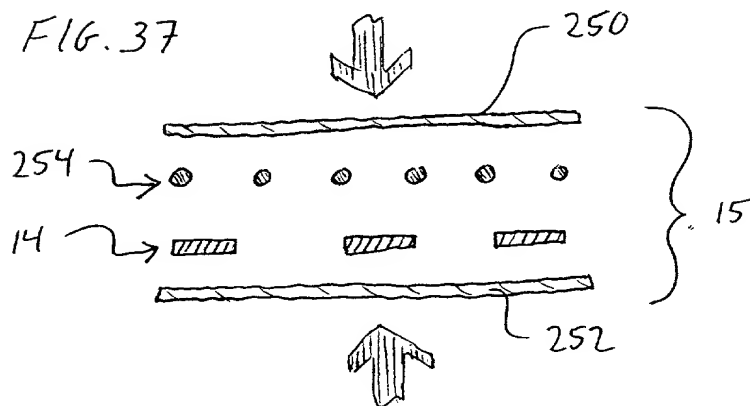


FIG. 38

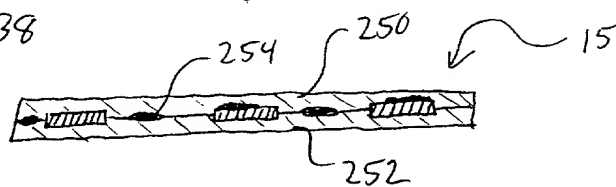


FIG. 39

